




HEAT PUMPS 2025

For residential and apartment buildings
For commercial and industrial properties



AIR-TO-WATER | GROUND-TO-WATER
FROM 1 TO 70 kW | CASCADES OVER 1000 kW







Dear customers and business partners,

on behalf of the entire Master Therm company, let me welcome you to the **catalogue of heat pumps with R290 refrigerant.**

The recent turbulent years have brought new dynamics to the market. It wasn't just the rising energy prices, which caused a sharp increase in demand for heat pumps and put unprecedented pressure on manufacturers, supply chain and distribution partners. **These were and still are also legislative requirements.**

Heat pumps are closely affected by the gradual decline of synthetic refrigerants. They are replacing them with natural refrigerants. **The refrigerant that is to set the trend for the use in heat pumps is most likely to be R290, or pure, natural propane.**

Preparing "propane" pumps to meet the highest Master Therm standards in terms of performance, efficiency, reliability and safety, has presented one of the most demanding challenges in our more than 30-year history. After more than three years of development we have launched a new series of pumps accompanied with the letter P for propane: **air-to-water BoxAir Inverter P and ground-to-water AquaMaster Inverter P.**

Heat pump with new, natural refrigerant **gets even more of an approval stamp of a green heat source that will carry on setting the direction in the heating and cooling of buildings.**

Although a new era is starting with R290 refrigerant, pumps with current refrigerants (R410a, R407, etc.) have nothing to worry about. Whether they are already in operation or are yet to be installed, they will continue to serve reliably and we will provide them with full service support.

Finally, let me give thanks. And first of all to you, current and future customers. Thank you for already choosing a Master Therm heat pump or perhaps currently considering it as a heat source for your home or business. Thank you for trusting in our superior technology and quality. I hope we won't disappoint you and that maybe this catalogue will be of help to you in making your choice.

On behalf of Master Therm heat pumps, Ltd.

Ing. Karel Guzek
Export manager

MASTER THERM: A CZECH DEVELOPMENT AND MANUFACTURING TRADITION SINCE 1994

Master Therm heat pumps, Ltd., is a Czech manufacturer of air-to-water, ground-to-water and water-to-water heat pumps covering applications from 1 to 1000+ kW. All technical development and production of Master Therm heat pumps take place in the Czech Republic, EU. Master Therm exports more than two thirds of its production abroad, especially to Western Europe.

Table of contents

3

Introduction and contents

4-5

About heat pumps

6-7

Range of products

8

7 Reasons to choose Master Therm

9

Certificates

10-11

Advanced technologies

12

How to get a heat pump

13-20

Domestic air-to-water:
BoxAir Inverter P

21-28

High powered air-to-water:
BoxAir 60 / 90 Inverter P

29-38

Domestic ground-to-water:
AquaMaster Inverter P

39-45

High powered ground-to-water:
AquaMaster 45 / 90 Inverter P

Heat pump: questions and answers

What is the purpose of a heat pump?

A heat pump serves as an efficient energy source utilized for heating residential homes, commercial establishments, or industrial buildings. Beyond providing heating, it is also employed for generating hot water and cooling indoor spaces. By serving as a sustainable alternative to electric or gas boilers, heat pumps are recognized for their renewable energy credentials, operating without adverse environmental consequences.

Where does its high efficiency come from?


Compared to an electric or gas boiler, a heat pump is significantly more efficient because it also provides heat for your home or business from the surrounding environment: air, ground or water. The electric power of the heat pump only accounts for about 20–30% of the heat energy collected.

This is what yields key energy savings compared to those of a conventional electric or gas boiler. The efficient use of freely available energy from the environment multiplies the heating efficiency by up to 5.5 times (SCOP = 5.5) compared to an electric boiler. And your heating bills can be up to 80% lower.

What is the seasonal SCOP heating factor?

The heating capacity of a heat pump is much higher than the electric power input of a compressor, i.e. the efficiency of the pump is many times higher than 100%. The ratio of the heating power and the compressor input is called the COP.

The Seasonal Coefficient of Performance (SCOP) is a measure that quantifies the efficiency of a heat pump by comparing the total amount of heat produced to the total electricity consumption over an entire heating season. Depending on the specific kind and type of system being considered, SCOP values can range between 3.5 and 5.5, indicating higher levels of efficiency and performance in certain configurations.

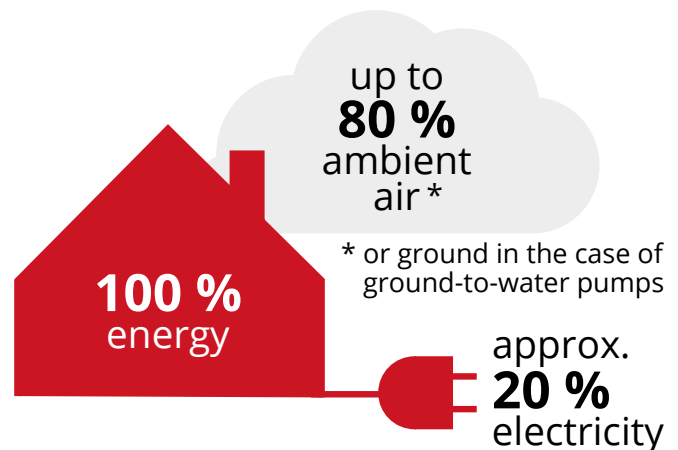

The heat pump can also cool thanks to the reverse mode. During the summer months, it can provide long-term cooling of the building and thus significantly increases comfort during summer.




Achieve faster investment returns with government grant support



Most of European countries offer a range of available grant supports. Inquire with your local distributor about the terms and conditions for subsidies. Master Therm heat pumps are registered and qualify for EU and local subsidies.




SYSTEMS OF HEAT PUMPS

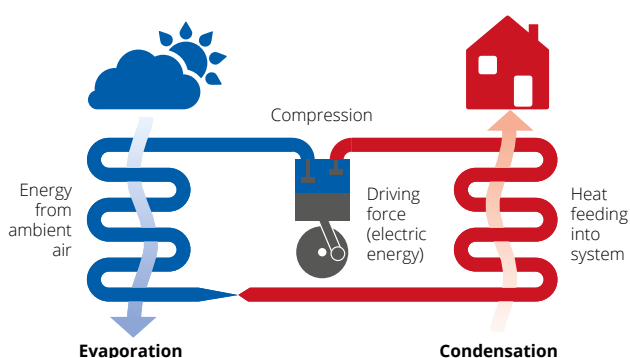

Air-to-water

Air-to-water heat pumps are based on the principle of extracting heat from the ambient air, whose temperature can be many degrees Celsius below zero. The heat extracted from the environment is transferred by the heat pump to the heating water that heats the building, or is used for the preparation of hot water. The system achieves a seasonal efficiency of up to 4.5 times higher than that of a conventional electric boiler and thus delivers significant energy savings.

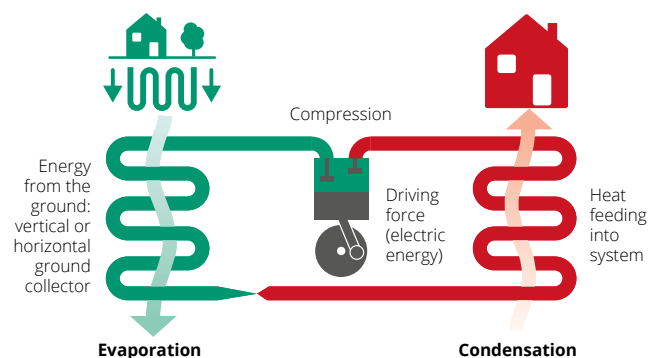

Ground-to-water

Ground-to-water heat pumps extract energy directly from the ground using a vertical or flat plate collector. An antifreeze mixture circulates through the collector and heats the ground. Thanks to the constant temperature of the ground, the heat pump has a stable source of energy throughout the year. The heat extracted from the ground is then transferred to the building. The system achieves a seasonal efficiency up to 5.5 times higher than that of a conventional electric boiler.

Model series: from 1 to 70 kW



BoxAir Inverter P

Domestic & residential Air-to-water

BoxAir Inverter P is the latest range of air-to-water heat pumps. Thanks to the sophisticated design, the use of state-of-the-art components and R290 refrigerant this pump offers exceptional operating efficiency and a high outlet water temperature (up to 75 °C). It provides heat and hot water for a small passive new building, as well as an multigenerational family residence with heat loss up to 19 kW. When connected to a cascade also suitable for apartment buildings and larger buildings.

KEY FEATURES

- **Power up to 25 kW**
- Compact monobloc heat pump with built-in control, circulation pumps, etc.
- Extremely quiet operation
- Frequency controlled compressor with R290 refrigerant
- Online control and monitoring
- Active cooling mode



BoxAir 60 / 90 Inverter P

High powered Air-to-water

The most powerful air-to-water heat pumps in the Master Therm range. Designed for efficient and highly economical heating of residential buildings, commercial buildings, industrial buildings, schools, offices or sports facilities.

KEY FEATURES

- **Power up to 50 kW**
- Total cascade power of more than 1000 kW
- Compact design, easy installation, fast payback
- Frequency-controlled compressor using R290 refrigerant
- MasterLAN power cascade control included
- Modbus RTU communication protocol
- Online control and monitoring
- Active cooling mode



AquaMaster Inverter P

Domestic & residential Ground-to-water

By harnessing energy directly from the ground, AquaMaster Inverter P offers year-round high efficiency, exceptional reliability and long service life. Suitable for heating and cooling family houses with heat loss up to 5 kW, both for separate buildings with their own ground source, and for property complexes with shared ground collectors or boreholes.

KEY FEATURES

- **Power up to 17 kW**
- Extremely compact design
- Passive cooling mode
- Frequency controlled compressor with R290 refrigerant
- **Integrated 150 l storage tank for SHW (AquaMaster Inverter Combi P)**
- Independent of outside temperature or weather
- Online control and monitoring



AquaMaster 45 / 90 Inverter P

High powered Ground-to-water

Compact ground-to-water heat pumps for residential and commercial applications. Efficient and powerful range of units with an output of up to 70 kW. Ready for cascades with total power of more than 1100 kW.

KEY FEATURES

- **Power up to 70 kW**
- Total cascade power of more than 1100 kW
- Passive cooling mode
- Frequency-controlled compressor using R290 refrigerant
- MasterLAN power cascade control included
- Modbus RTU communication protocol
- Online control and monitoring

What does R290 refrigerant bring?

R290 or pure propane is a refrigerant with minimal impact on the environment (global warming potential GWP = 3). Despite its purely natural origin it has suitable thermodynamic properties for heat transfer. This is what R290 heat pumps successfully use to allow even higher heating efficiency and higher output temperature water (up to 75 °C). Safety is assured via a hermetically sealed cooling circuit, leak sensor or automatic pump shutdown.

7 reasons to choose Master Therm

1 A tradition since 1994



Master Therm was established in the Czech Republic in the 1990s, originally as an importer of heat pumps from the USA. Over years of gradual work on our own, we have become a manufacturer with a complete in-house development. All heat pumps from Master Therm are invented, designed and manufactured in the Czech Republic.

2 We offer a comprehensive and smart solution



With us you get a heating system, not just a separate heat source. We supply complete heat pump systems of all types, including **our own control software that can work with photovoltaics or automatically react to future spot electricity prices.**

3 Quality and innovation



Master Therm heat pumps are characterised by their efficient design, which ensures extremely quiet operation and trouble-free service access. We are among the pioneers in the development of electronic refrigerant injection (EEV), infinitely variable compressor power control (inverter) and software for controlling heating circuits.

4 Service and warranty



With a network of in-house technicians and immediate availability of spare parts, we guarantee nationwide service coverage. When you buy a heat pump, our journey together is just beginning. We offer online service monitoring of pumps and an extended warranty with unlimited coverage.

5 Reputation abroad



Master Therm exports more than 70% of its production abroad, especially to Western Europe. The most important foreign markets include the UK, Ireland, the Netherlands, Belgium, Italy, Switzerland, Estonia or Slovakia.

6 Awards and certificates



Our pumps are among the most appreciated, both at home and abroad. In addition to more than 20 international awards, we hold an ISO quality management certificate, Heat Pump Keymark certificate, certificates from the authorized testing laboratory ETI (SZÚ) in Brno, Czech Republic, EU, a certificate from the BBA of the United Kingdom and others.

7 Subsidies



In most countries heat pumps are registered in lists for subsidy titles. Ask your local distributor about terms and conditions of subsidies.



MASTER THERM HOLDS THE FOLLOWING CERTIFICATES:

European certification mark
The Heat Pump KEYMARK



Heat Pump KEYMARK

Quality Certificate for the Single European Market

The Heat Pump KEYMARK certificate is the European independent quality certificate for heat pumps entering the Single Market and covered by EU Regulations 813/2013 and 814/2013 – efficiency requirements (ecodesign).



Certificate of the testing institute Certificate of compliance with Czech and EU standards

Performance parameters and compliance of product characteristics with the requirements of the EN 14 511 standard. The Master Therm heat pumps are tested and certified by the accredited Engineering Testing Institute (SZÚ) in Brno, Czech Republic, EU.



BBA MCS Certificate

British quality certificate, allows to draw on British government incentives

Master Therm heat pumps are certified by the British Board of Agrément (BBA) according to the MCS (Microgeneration Certification Scheme) standard, designed for systems for the production of heat and electricity from re-newable sources.



ISO 9001:2015 Certificate International Quality Certificate

Quality Management System Certificate in accordance with ISO 9001:2015. Scope of certification: manufacture, sale, installation and service of heat pumps. Certification body: BUREAUVERITAS GROUP.



Type conformity assessment protocol

Certificate confirming the characteristics of the products with the stated parameters

Certificate confirming that the type test has been successfully carried out on Master Therm products. It proves that the stated technical specifications of the products comply with the Czech and European Union standards.

We deliver and service all over Europe



Production plant


Dolní Třič 636,
Jablonec nad Jizerou,
Czech Republic

Establishment & showroom

Okrajová 187,
Chýně-Prague West,
Czech Republic

Advanced technologies

Master Therm Online

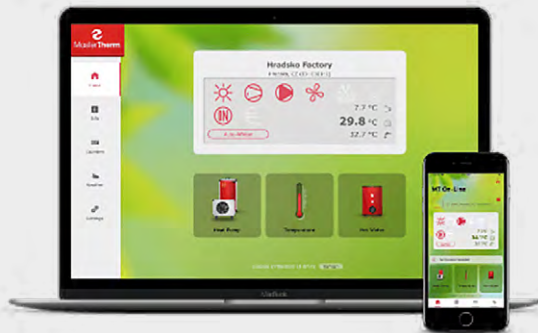

Connecting the Master Therm heat pump to the internet allows it **to be controlled from anywhere via the web browser on Master Therm.online or via an app on a mobile phone or tablet.** You are thus in full control of your home's heat, which is within easy reach. Continuous service supervision and remote diagnostics included.

iOS app



Android app



Touchscreen display



The main control panel of the heat pump is the pGDx terminal, featuring a 4.3-inch touchscreen for easy temperature setting and control. It allows for centralized management of multiple heating circuits, supports Smart Grid communication, and offers connectivity options like Ethernet or Wi-Fi for network integration. Automatic online updates ensure optimal performance.

**SMART
GRID
READY**

Advanced control software



All Master Therm heat pumps are equipped with a proprietary app that efficiently manages the cooling circuit and its peripherals. This system employs an equithermal approach that tracks external temperatures and incorporates sophisticated backward temperature control within the building using internal room sensors. Consequently, the heat pump is able to accurately sustain a consistent indoor temperature with exceptional precision, ensuring it never operates at a heating water temperature higher than required. Additionally, these heat pumps have the capability to seamlessly integrate with photovoltaic systems and automatically adjust to fluctuations in electricity spot prices for optimal efficiency.

Natural refrigerant R290



In the refrigeration compressor circuit, we employ the eco-friendly R290 refrigerant, known for its purity due to its natural propane composition. This refrigerant provides several advantages, including favourable thermodynamic properties that optimize the heat pump's efficiency and performance, leading to increased output water temperatures of up to 75°C. The system emphasizes safety by utilizing a hermetically-sealed containment method to prevent refrigerant leakage. Furthermore, additional safety measures such as a leakage detector, automatic unit shutdown system, and check valves within the cooling circuit are integrated to ensure maximum security and reliability.



Electronically controlled expansion valve (EEV)



Master Therm is one of the leaders in the use of electronic refrigerant injection technology. The EEV allows for precise control of the superheat temperature of the refrigerant vapour in the evaporator. This allows the evaporator area to be used with maximum effect for the evaporation of the refrigerant, resulting in higher plant efficiency. The EEV thus increases the heating factor, operational reliability and lifetime.


The EEV also protects the compressor against liquid injection at high loads. On the other hand, in the low-load mode (e.g., with a heating duct outlet temperature of less than 30°C), the electronic valve can be fully opened and a high-heating factor can be achieved, which is not possible with a thermostatic valve (TEV).

Heating in winter, cooling in summer



All Master Therm heat pumps can fully cool the building. By purchasing a pump, you are, therefore, also purchasing the perfect cooling solution for summer. Thanks to its design, it has approximately half the running costs of a conventional air conditioner. Additionally, even while in cooling mode, it can simultaneously heat hot water for domestic use.

For ground-to-water pumps, we offer **a passive cooling module that transfers heat from the interior to the ground collector without the need for a compressor.** This ensures extremely efficient summer cooling and contributes to the regeneration of the collector after the heating season.

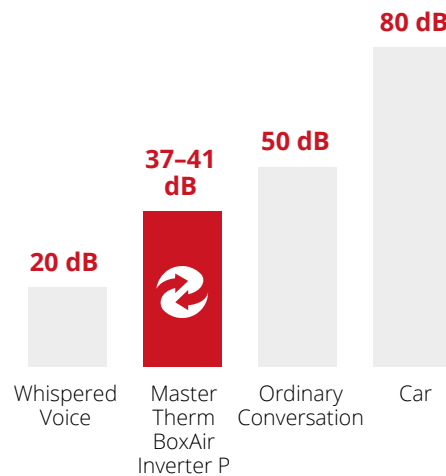

Quiet compressors and fans



All Master Therm heat pumps use quiet-scroll or double-rotary compressors, located in the unit in a special anti-vibration frame. Of course, the pump casing itself is carefully soundproofed.

For air-to-water heat pumps, we use the most modern low-speed fans with very low sound pressure levels, which ensure minimum noise levels in outdoor units.


Frequency-controlled BLDC compressor



A compressor with a frequency converter (inverter) allows the heat pump continuously to regulate the heating / cooling capacity. The main advantages of inverter technology are electricity savings, more efficient use of heat exchangers, a reduction in the number of compressor starts, a reduction in the energy required to defrost the evaporator (air-to-water system), and as a result, an increase in the heating factor.

Thanks to the inverter, the pump does not require the installation of a storage tank, thus saving investment costs and space in the machine room.

HOW TO GET A MASTER THERM HEAT PUMP?

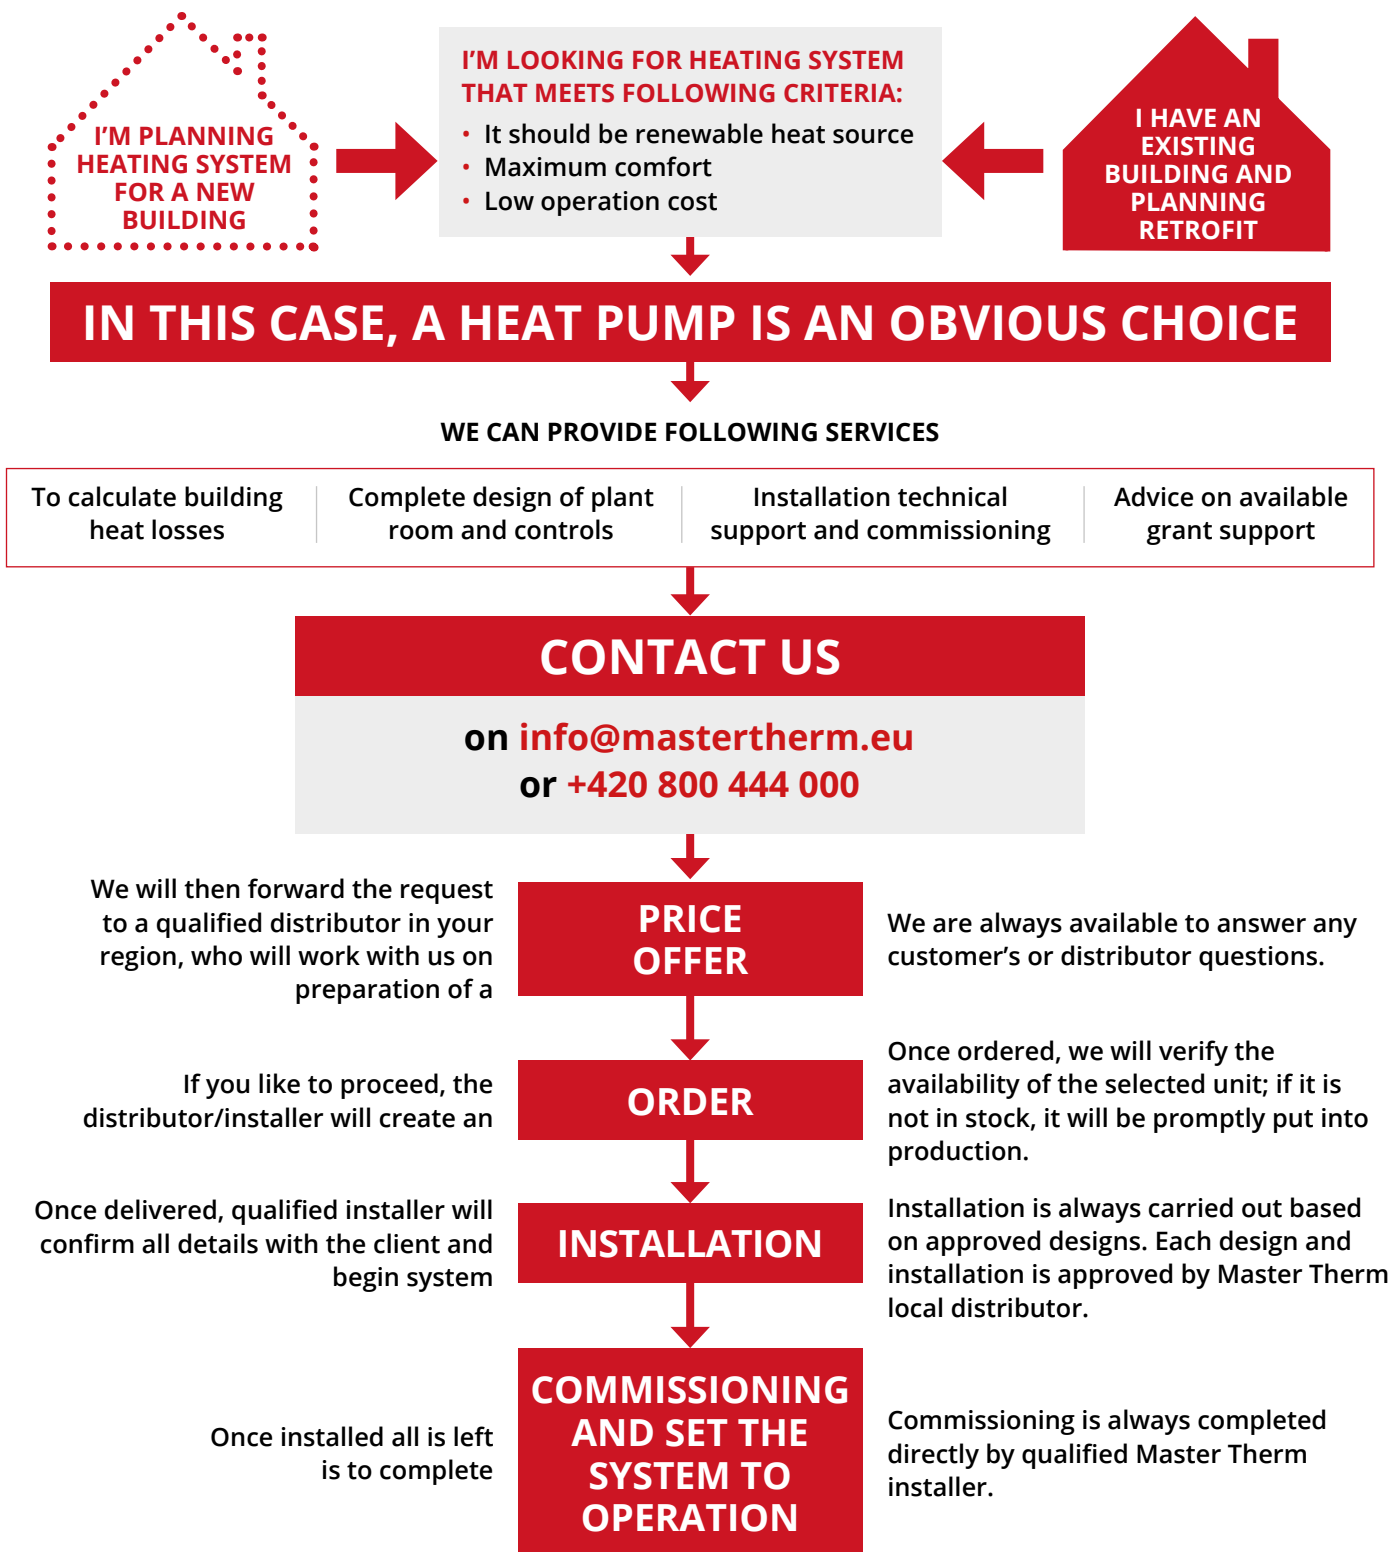

AFTER THE INSTALLATION, OUR JOURNEY TOGETHER BEGINS, MARKED FOR MANY YEARS TO COME BY YOUR HOME THERMAL COMFORT AND LOWER ENERGY BILLS.

AFTER THE FIRST AND EVERY SUBSEQUENT SEASON, WE'LL COME TO YOUR HOME FOR A PREVENTIVE SERVICE INSPECTION TO KEEP YOUR HEAT PUMP IN TOP SHAPE.

BoxAir Inverter P

Domestic & residential
Air-to-water



Czech (EU)
product



A tradition
since 1994



Exported into
30 countries
worldwide



Online
control

BoxAir Inverter P

for domestic & residential applications

BoxAir Inverter P is the latest heat pump range based on natural refrigerant R290. This offers even more performance, efficiency and output water temperature up to 75 °C.

The BoxAir Inverter P provides heat and sanitary hot water for small passive new constructions as well as for an multigenerational family residences with a heat loss of up to 19 kW. In the summer months, it can also add as a cooling facility.

The BoxAir Inverter P is also suitable for apartment buildings and communal areas. When the need arises for higher heating capacity, several heat pumps can be connected in a cascade in succession.



BoxAir Inverter P
All in one, all outside




KEY FEATURES

- High efficiency and future-proofing with near-zero GWP refrigerant R290
- **Power from 1 to 25 kW (A7W35)**
- Extremely quiet operation according to current EU standards
- All internal components fully serviceable
- High reliability and easy maintenance
- Warranty and after-warranty service directly from the manufacturer
- Reverse cooling mode
- Integrated control system for up to 6 heating circuits
- Online control and monitoring





AIR-TO-WATER HEAT PUMPS

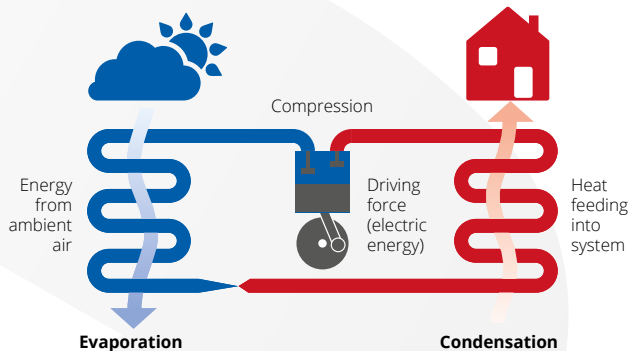

HOW THEY WORK

Air-to-water heat pumps are based on the principle of extracting heat from the ambient air, the temperature of which can be many degrees Celsius below zero. The heat extracted from the environment is transferred by the heat pump to the heating water that heats the building or is used in the preparation of hot water. **The system achieves seasonal efficiencies of more than 4.5 times higher than those of a conventional electric boiler and thus delivers significant energy savings.**



MAIN ADVANTAGES

The major advantages of air-to-water pumps include **relatively low investment costs, quick and easy installation and the easy availability of a primary energy source:** air is everywhere around us.



HEATS IN WINTER, COOLS IN SUMMER

Air-to-water heat pumps are suitable not only for heating and heating hot water or swimming pools all year round, but also for cooling the building in the summer months thanks to the possibility of reverse operation.




HEAT PUMPS AND SUBSIDIES

Heat pumps are recognised as a **renewable energy source**. Ask your local distributor if it is possible to obtain subsidies for them.

MASTER THERM: A CZECH MANUFACTURING TRADITION SINCE 1994

Master Therm is a manufacturer of air-to-water, ground-to-water and water-to-water heat pumps for residential, commercial and industrial buildings. All technical development and production of Master Therm heat pumps is carried out in the Czech Republic, EU.

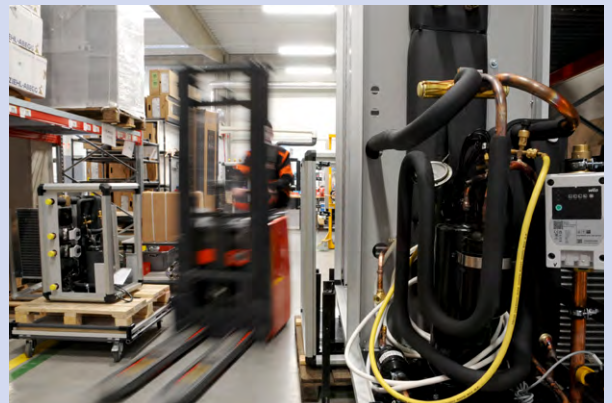

More than two-thirds of Master Therm's production are exported abroad, especially to Western Europe. Master Therm also carries out special projects such as heat recovery systems at the IT4Innovations supercomputer centre in Ostrava, Czech Republic, the cooling and recovery of waste heat from particle accelerators at the Institute of Nuclear Physics of the Czech Academy of Sciences or cooling and heat recovery of CEZ Group Energo cogeneration units.



BoxAir Inverter P

All in one, all outside

Extremely quiet and economical monobloc air-to-water heat pump with R290 refrigerant. Ideal for family houses with heat loss of up to 19 kW.

Fans and evaporator

Ultra-quiet fans with smooth speed regulation and an evaporator with directed outflow of the condensate.

Safety first

Thanks to the low volume of the R290 refrigerant in the system, an integrated refrigerant leak detector, and automatic shutdown of the unit.

Frequency-controlled compressor with R290 refrigerant and electronically controlled expansion valve

Top technology increase efficiency (heating factor), operational reliability and long lifetime of the equipment. Included is also a built-in speed-controlled circulator pump.

Resilient all-aluminium cabinet

Aluminium construction of panels with a long-lasting resistance to weathering and corrosion.



A⁺⁺⁽⁺⁾ Energy efficiency



Top-notch design





Online control

Unique Master Therm software for pump control

- Custom application for controlling the cooling circuit and peripherals
- Equithermal MaR (measurement and regulation) system
- Advanced **feedback control of building temperature** based on internal room temperature sensors
- Control via touchscreen terminal or online application
- Includes **remote service monitoring** and diagnostics
- Control of up to 6 heating circuits, including the possibility of connecting a pool or solar panel
- Cooperation with photovoltaics: **in-built connection to PV inverter**
- Smart tariff & Smart Grid: **automatic optimization of heat pump's operation based on future spot electricity prices**



SMART GRID READY ✓

Model		Performance at A7W35	Heat loss of the building Q _z	Seasonal energy efficiency of heating at 35 °C low temperature operation		Seasonal energy efficiency of heating at 55 °C medium temperature operation		Maximum heating / SHW temperature	Order number
		kW	kW	SCOP	class	SCOP	class	°C	regulation PLUS (pCO5)
	BoxAir 22 Inverter P	2–7	up to 5	4.85	A+++	3.76	A++	75	3-ph: BA22IP-311U 1-ph: BA22IP-111U
	BoxAir 26 Inverter P	4–14	up to 11	5.14	A+++	3.83	A+++	75	3-ph: BA26IP-311U 1-ph: BA26IP-111U
	BoxAir 37 Inverter P	6–20	up to 15	4.93	A+++	3.93	A+++	75	3-ph: BA37IP-311U 1-ph: BA37IP-111U
	BoxAir 45 Inverter P	8–25	up to 19	4.74	A+++	3.61	A++	75	3-ph: BA45IP-311U



The BoxAir 22 IP and BoxAir 26 IP models offer even more compact dimensions.

Designed for	multiple-circuit heating systems
Main heating circuit	yes
Independent heating circuit	independently 2 incl. mixing
Space temperature	in 2 zones
Hot water (SHW)	yes
Selectable	up to 6 heating circuits

KEY FEATURES

- Compact monobloc outdoor thermal air-to-water pump
 - **Easy installation without intervention to the cooling (compressor) circuit and into the existing heating system**
 - Without indoor unit, all accessories including control and circulation pump integrated into the external unit
 - Full serviceability of all components
-
- Zero internal noise
 - **Minimised external noise due to ultra-quiet fans** with smooth rotation control
-
- Use for **heating and cooling of the building** including SHW preparation
 - Smart home integration: online 24/7 monitoring, modbus/BMS, integrated electricity meter, communication with PV inverter and batteries, connection to Smart Grids, etc.
 - Support for connection to a power cascade without the need to use a higher-level MaR (measure and regulation) third-party system
-
- **Heating water and SHW temperature up to 75 °C**
 - Anti-legionella function from compressor only
 - Outdoor temperature range from -20 °C to +40 °C
 - Integrated bivalent power supply as standard



Optional equipment

Master Therm Online App

Connecting the pump to a central Master Therm server allows the pump to be controlled online from anywhere via the web or app. Includes remote service access.

Full (active) cooling mode

Reverse pump operation allowing long-term cooling of the interior in summer.

Terminal pAD

Temperature compensation for independent heating circuit.

Terminal pADh (with humidity sensor)

Temperature compensation for independent heating circuit with dew point watching (floor cooling).

Expansion module

Increases the number of regulated independent heating circuits up to 6 (from the basic 2).

Integrated electric meter 3x 65 A / 1x 100 A

Built-in electric meter for local measurement of electricity consumption. MID certification.

RAL colour

Individual colour for pump panels.

Evaporator with corrosion resistant coating

Increased resistance for applications near the sea, etc.

BoxAir Inverter P



		BoxAir 22 IP	BoxAir 26 IP	BoxAir 37 IP	BoxAir 45 IP
Power range at A7W35		kW 2–7	kW 4–14	kW 6–20	kW 8–25
Heat loss of the building Q_2		kW up to 5	kW up to 11	kW up to 15	kW up to 19
P-Design		4	7	11	14
Power A7W35 ¹	40 rps (if not defined otherwise)	kW 4.18 (60 rps)	kW 5.55	kW 9.66	kW 11.44
	COP	5.01	5.18	5.10	4.73
Power A2W35	40 rps	kW 2.38	kW 4.66	kW 8.19	kW 9.39
	COP	4.19	4.13	4.15	4.04
Power A–7W35	80 rps	kW 3.67	kW 7.85	kW 11.43	kW 14.61
	COP	3.11	3.07	2.71	3.08
Power A–15W35	90 rps	kW 3.71	kW 7.93	kW 10.97	kW 14.29
	COP	2.88	3.01	2.53	2.77
Power A7W55	60 rps	kW 4.18	kW 5.55	kW 9.66	kW 11.44
	COP	5.01	5.18	5.10	4.73
Power A7W45	90 rps (if not defined otherwise)	kW 6.05	kW 8.16 (60 rps)	kW 18.15	kW 16.75 (60 rps)
	COP	3.75	4.03	3.14	3.80
Power A–3W45	90 rps (if not defined otherwise)	kW 4.38	kW 8.36 (80 rps)	kW 13.68	kW 18.15
	COP	2.79	2.76	2.39	2.81
Power A–3W55	90 rps (if not defined otherwise)	kW 4.19	kW 8.19 (80 rps)	kW 13.36	kW 17.35
	COP	2.39	2.42	2.11	2.41
Seasonal heating energy efficiency at 35 °C low temperature operation	power ³	kW 4.04	kW 6.57	kW 11.50	kW 14.96
	SCOP	4.85	5.14	4.93	4.74
	η_s	% 191	% 203	% 194	% 187
	class	A+++	A+++	A+++	A+++
Seasonal heating energy efficiency at 55 °C medium temperature operation	power ³	kW 3.63	kW 6.22	kW 10.85	kW 13.62
	SCOP	3.76	3.83	3.93	3.61
	η_s	% 147	% 150	% 154	% 141
	class	A++	A+++	A+++	A++
Refrigerant		R290	R290	R290	R290
Electric circuit breaker ²		16 A"B"	20 A"B"	25 A"B"	32 A"B"
Compressor	connection	1x 230 V or 3x 400 V	1x 230 V or 3x 400 V	3x 400 V	3x 400 V
Weight		kg 120	kg 130	kg 165	kg 165
Mandatory leakage checks according to EP 517/2014		no	no	no	no
Maximum heating water temperature		°C 75	°C 75	°C 75	°C 75
Heating capacity of integrated electric boiler	bivalence mode	kW 4.5	kW 4.5	kW 7.5	kW 7.5
	backup mode (and at temperatures below -20 °C)	kW 4.5 + 4.5	kW 4.5 + 4.5	kW 7.5 + 7.5	kW 7.5 + 7.5
Acoustic performance L_w		dB(A) 50	dB(A) 53	dB(A) 55	dB(A) 60
Sound pressure level L_p at a distance from the outdoor unit	1 m	dB(A) 41	dB(A) 44	dB(A) 46	dB(A) 51
	5 m	dB(A) 29	dB(A) 32	dB(A) 34	dB(A) 39
	10 m	dB(A) 23	dB(A) 26	dB(A) 28	dB(A) 33


1 Performance data according to EN 14 511, in accordance with EHPA requirements for the award of the Q quality mark. A7W35 60 Hz - air 7 °C, water 35 °C, compressor frequency 60 Hz.

2 Recommended value of electrical protection 3x 400 V, incl. auxiliary integrated electric boiler. The 22IP, 26IP, 37IP and 45IP units can also be connected to a mains supply of 1x 230 V with a fuse of 40 A "B" (22I) or 50 A "B" (26I, 30I).


3 Design output at an outdoor temperature of -10 °C according to EN 14 825.




DIMENSIONS OF MODELS BOXAIR 37 IP AND 45 IP

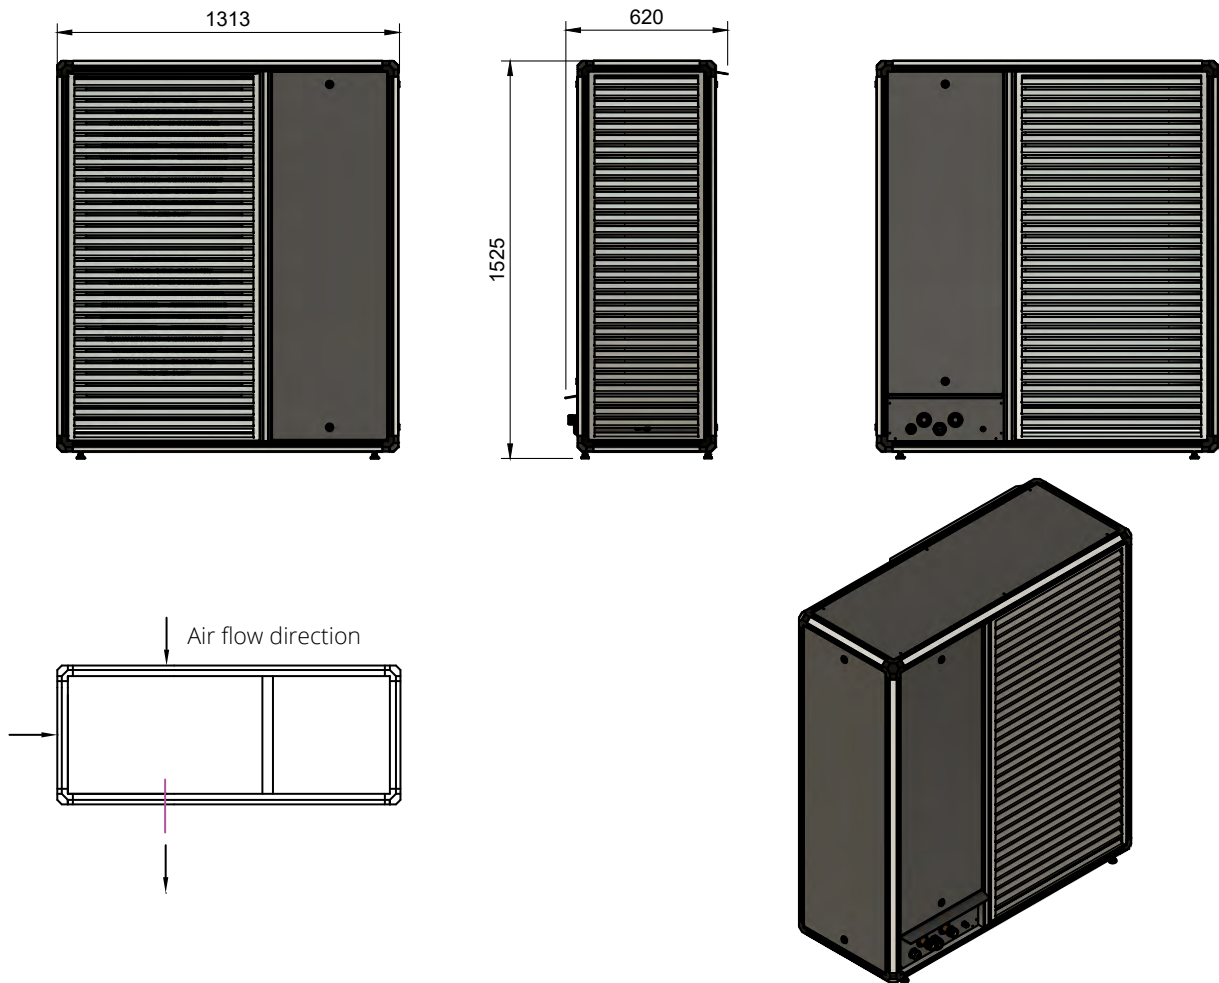

DIMENSIONS OF MODELS BOXAIR 22 IP A 26 IP

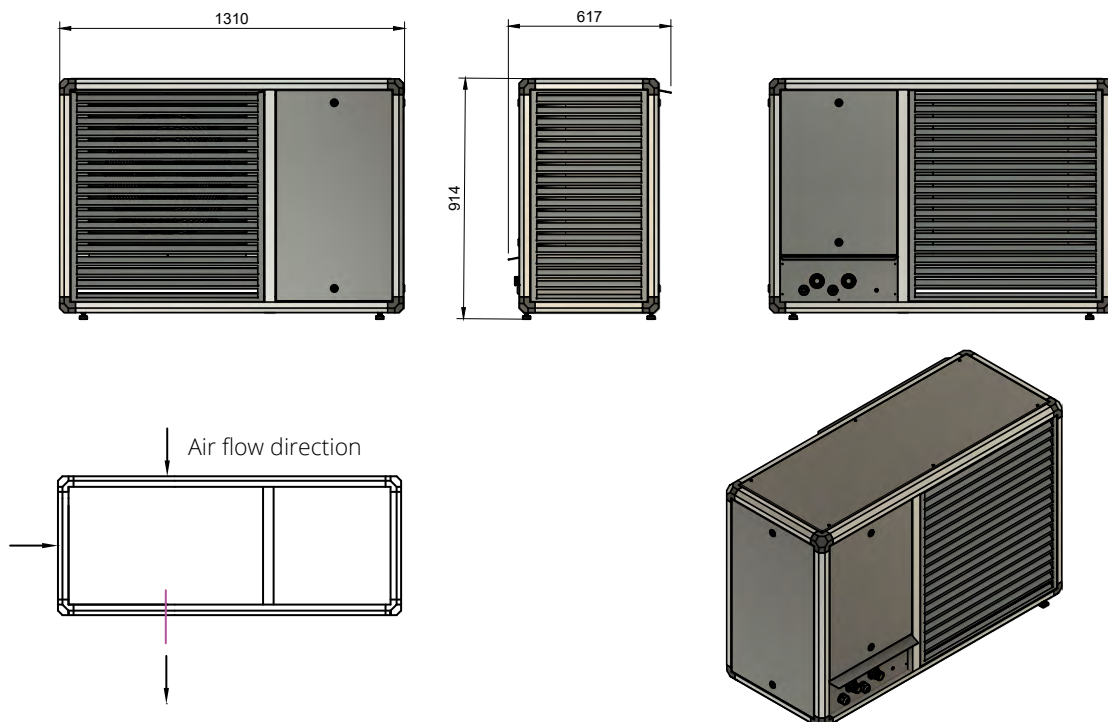


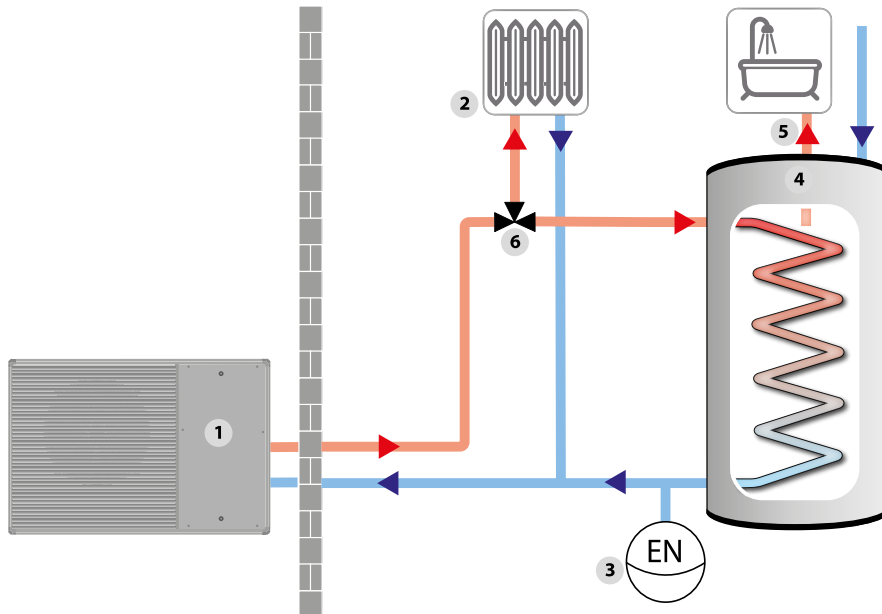

DIRECT CONNECTION OF HEAT PUMP TO HEATING SYSTEM AND HW (HEATING-WATER) TRANSFER MODE

- 1 heat pump
- 2 heating system
- 3 expansion tank
- 4 HW indirect heating storage tank
- 5 HW outlet
- 6 3-way valve

The heat pump (1) is directly connected to the heating system. The heating water temperature varies depending on the outside temperature. When SHW heating is required, the space heating is switched off, and the 3-way valve (6) is switched on. By automatically increasing the heating water outlet temperature from the heat pump, the SHW storage tank (4) is heated. After set point is achieved, the system returns to space heating mode. The configuration is particularly suitable for underfloor heating, and also for systems with a sufficient volume of heating water.

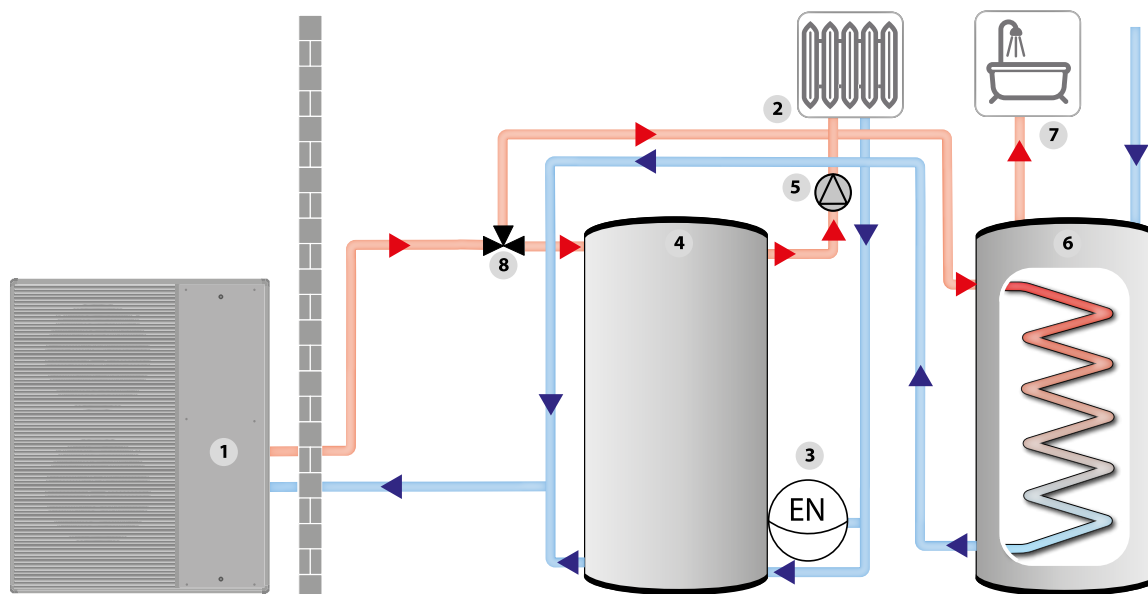

CONNECTION WITH HEATING WATER ACCUMULATION TANK AND HW HEATING TRANSFER MODE

- 1 heat pump
- 2 heating system
- 3 expansion tank
- 4 storage tank
- 5 heating system PC
- 6 HW indirect heating storage tank
- 7 HW outlet
- 8 3-way valve

The heat pump (1) is connected to the heating system via the storage tank (4), which acts as both heat storage and thermohydraulic distributor. The temperature of the heating water varies depending on the outside temperature. The flow of heating water through the heating system is provided by a circulating pump (5). When SHW heating is required, the space heating is switched off, and the 3-way valve (8) is switched on. By automatically increasing the heating water outlet temperature from the heat pump, the SHW storage tank (6) is heated. After set point is achieved, the system returns to space heating mode.

BoxAir Inverter P

High powered
Air-to-water



Czech (EU)
product



A tradition
since 1994



Exported into
30 countries
worldwide



Online
control

BoxAir Inverter P

for public, commercial,
residential & industrial buildings

**The most powerful air-to-water heat pumps in the Master Therm range.
Up to 50 kW per compressor unit.**

Designed for heating and cooling of residential, commercial and industrial buildings, schools, offices, or sports grounds.

Easily connectible to the cascade. Ensures a very high overall power of 100–1000 kW for large-scale buildings or industrial plants.



**BoxAir 60
Inverter P**

Compact
monobloc
30 kW



**BoxAir 90
Inverter P**

Compact
monobloc
50 kW




KEY FEATURES

- **Power of up to 50 kW per compressor circuit**
- Modbus RTU communication protocol
- MasterLAN power cascade control included
- Online control and monitoring
- Total cascade power of more than 1000 kW
- Active cooling as optional equipment





AIR-TO-WATER HEAT PUMPS

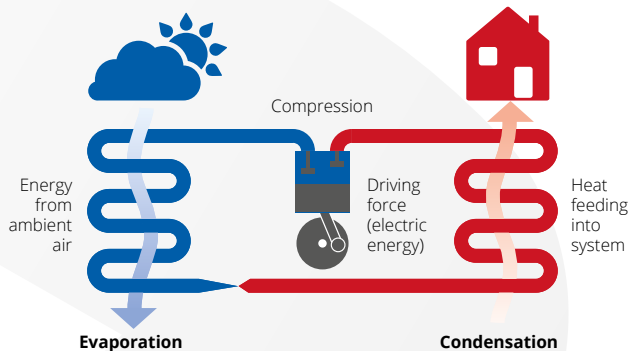

HOW THEY WORK

Air-to-water heat pumps are based on the principle of extracting heat from the ambient air, the temperature of which can be many degrees Celsius below zero. The heat extracted from the environment is transferred by the heat pump to the heating water that heats the building or is used in the preparation of hot water. **The system achieves seasonal efficiencies of more than 4.5.**



MAIN BENEFITS

The **high-end components** used and **the unique control system employed offer highly efficient and extremely quiet operation**, the ability to control up to 6 independent heating/cooling circuits and extended service life.



PROMPT RETURN ON INVESTMENT

An investment proven in practice: In the industrial facilities implemented so far, **the economic return is in the order of several years.**



HEATING AND COOLING

With a heat pump, a building or facility can be heated in winter and cooled in summer.



POWER CASCASCADE FOR HIGH PERFORMANCE


With the integrated MasterLAN software, **up to 16 heat pumps can be easily set up and connected to control power cascades.**

MASTER THERM: A CZECH MANUFACTURING SINCE 1994

Master Therm is a manufacturer of air-to-water, ground-to-water and water-to-water heat pumps for single-family residences and apartment buildings as well as industrial facilities. All technical development and production of Master Therm heat pumps is carried out in the Czech Republic.



More than two thirds of Master Therm's production is exported abroad, especially to Western Europe. Master Therm also carries out special projects such as heat recovery systems at the IT4Innovations supercomputer centre in Ostrava, cooling and recovery of waste heat from particle accelerators at the Institute of Nuclear Physics of the Czech Academy of Sciences and cooling and heat recovery of ČEZ Energy cogeneration units.

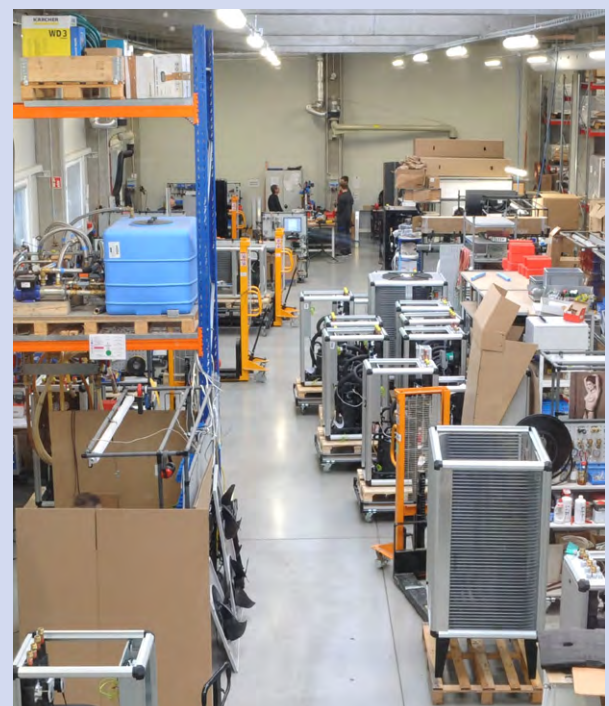

BoxAir 60 / 90 Inverter P

Compact monobloc

Highly efficient and environmentally friendly heat pumps for heating and cooling commercial & administrative buildings, production or storage halls, schools, sports facilities, and other larger facilities.

Safety first

With integrated refrigerant leakage detector and automatic shut down of the unit.



With high performance

BoxAir 90IP offers performance of 50 kW (A7W35), which makes it the most powerful air-to-water heat pump on our offer.

Handles temperatures up to 75 °C

Thanks to R290 refrigerant the outlet water temperature from the pump is up to 75 °C. Both for heating, as well as SHW.



BoxAir 60 Inverter P

Air-to-water unit with power of 30 kW is more compact in size



Ready for industrial applications



Top-notch design



Online control



Unique Master Therm software for pump control

- Custom application for control of the cooling circuit and peripherals
- Equithermal MaR (measurement and control)
- Advanced **temperature feedback control in the building** based on indoor room temperature sensors
- Control via touchscreen terminal or **online application**
- Includes remote service monitoring and diagnostics
- Control of up to 6 heating circuits incl. optional solar connection
- Cooperation with photovoltaics: **in-built connection to PV inverter**
- Smart tariff & Smart Grid: **automatic optimization of heat pump's operation based on momentary electricity tariffs**



**SMART
GRID
READY**



Model	Performance at A7W35	Heat loss of the building Q_z	Seasonal energy efficiency of heating at 35 °C low temperature operation		Seasonal energy efficiency of heating at 55 °C medium temperature operation		Maximum heating / SHW temperature	Order number (according to heating circuit control)
	kW	kW	SCOP	class	SCOP	class	°C	regulation PLUS (pCO5)
 BoxAir 60 Inverter P	7-30	up to 25	4.89	A+++	3.73	A++	75	3-ph: BA60IP-311U
 BoxAir 90 Inverter P	12-50	up to 40	4.68	A+++	3.55	A++	75	3-ph: BA90IP-311U

KEY FEATURES

- Air-to-water system in a compact implementation
- Frequency-controlled compressor with R290 refrigerant
- **Power up to 50 kW per compressor circuit**
- Easy installation and connection to the building's heating system without the need for modifications
- **All internal components fully serviceable**
- No indoor unit
- MasterLAN power cascade control in basic equipment
- Modbus RTU communication protocol in basic equipment
- Built-in circulation pump with speed control



- Minimised noise due to ultra-quiet fans with infinitely variable speed control



- Smart grid integration: connectivity to the Internet incl. 24/7 monitoring, modbus/ BMS, integrated MID electricity meter, **communication with FV inverter and batteries**, connection to Smart Grids, etc.
- Use for heating and cooling of the building incl. hot water preparation
- Up to 16 pumps can be connected to power cascades



- Outdoor temperature range -20 °C to +40 °C
- **Heating water / SHW temperature up to 75 °C**
- Anti-legionella function from compressor only
- Possibility of managing collaboration with other, external heat sources
- Built-in bivalent power supply



Designed for	multiple-circuit heating systems
Main heating circuit	yes
Independent heating circuit	independently 2 incl. mixing
Space temperature	in 2 zones
Hot water (SHW)	yes
Selectable	up to 6 heating circuits

Optional equipment

Master Therm Online App

Connecting the pump to a central Master Therm server allows the pump to be controlled online from anywhere via the web or app. Includes remote service access.

Full (active) cooling mode

Reverse pump operation allowing long-term cooling of the interior in summer.

Terminal pAD

Temperature compensation for independent heating circuit.

Terminal pADh (with humidity sensor)

Temperature compensation for independent heating circuit with dew point watching (floor cooling).

Expansion module

Increases the number of regulated independent heating circuits up to 6 (from the basic 2).

Expanded control module

For industrial/commercial applications.

Integrated electric meter 3x 65 A

Built-in 3-phase electric meter for local measurement of electricity consumption. MID certification.

RAL colour

Individual colour for pump panels.

Evaporator with corrosion resistant coating

Increased resistance for applications near the sea, etc.

BoxAir 60 / 90 Inverter P



		BoxAir 60IP		BoxAir 90IP	
Power range at A7W35		kW	8–30		11–50
Heat loss of the building Q_z		kW	up to 25		up to 40
P-Design		kW	21		31
Power A7W35 ¹	60 rps	kW	18.5		26.18
	COP		5.02		4.92
Power A2W35	60 rps	kW	14.34		20.60
	COP		4.08		3.99
Power A–7W35	90 rps	kW	17.56		24.81
	COP		3.17		2.95
Power A–15W35	120 rps	kW	21.29		30
	COP		2.25		2.56
Power A7W55	60 rps	kW	16.67		22.81
	COP		3.28		2.97
Power A7W45	120 rps (if not defined otherwise)	kW	27.83 (90 rps)		48.35
	COP		3.77		3.30
Power A–3W45	120 rps	kW	26.51		34.02
	COP		2.67		2.48
Power A–3W55	120 rps	kW	25.91		33.50
	COP		2.33		2.12
Seasonal energy efficiency heating – low-temperature operation at 35 °C	power ³	kW	21.54		29.4
	SCOP		4.89		4.68
	η_s	%	193		184
	class		A+++		A+++
Seasonal energy efficiency heating – medium-temperature operation at 55 °C	power ³	kW	20.28		29.14
	SCOP		3.73		3.55
	η_s	%	146		139
	class		A++		A++
Refrigerant			R290		R290
Electric circuit breaker ²			32 A"B"		40 A"B"
Compressor	connection		3x 400 V		3x 400 V
Weight		kg	230		275
Mandatory leakage checks according to EP 517/2014			yes		yes
Maximum heating water / SHW temperature		°C	75		75
Heating capacity of the integrated electroboiler	bivalence mode	kW	7.5		15
	backup mode (and at temperatures below -20 °C)	kW	7.5 + 7.5		15 + 15
Acoustic performance L_w		dB(A)	62		62
Sound pressure level L_p at distance from outdoor unit	1 m	dB(A)	53		53
	5 m	dB(A)	41		41
	10 m	dB(A)	35		35

¹ Performance data according to EN 14 511, in accordance with EHPA requirements for the award of the Q quality mark. A7W35 60 Hz - air 7 °C, water 35 °C, compressor frequency 60 Hz.


² Recommended electrical protection value 3x 400 V, incl. auxiliary integrated electric boiler.

³ Design output at outdoor temperature of -10 °C according to EN 14 825.

DIMENSIONS OF MODEL BOXAIR 60 IP



DIMENSIONS OF MODEL BOXAIT 90 IP

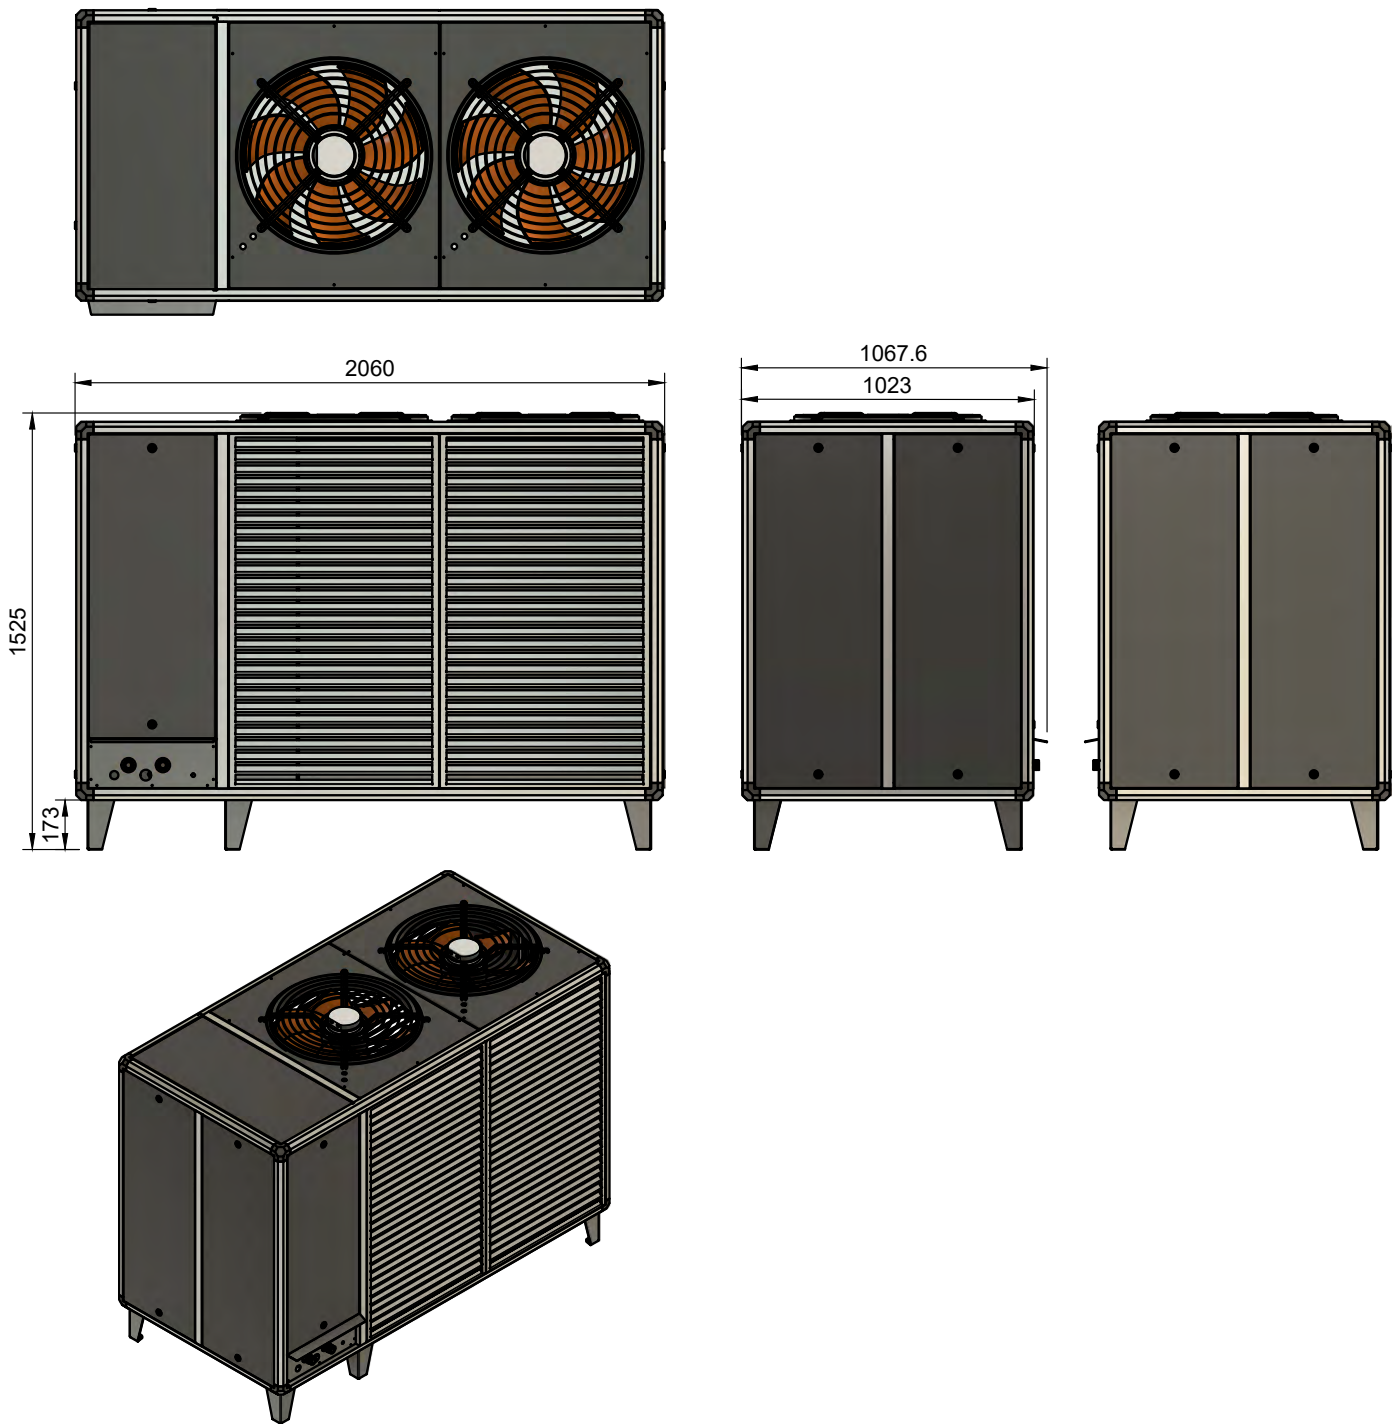

AquaMaster Inverter P

Domestic & residential
Ground-to-water



Czech (EU)
product



A tradition
since 1994



Exported into
30 countries
worldwide



Online
control

AquaMaster Inverter P

for domestic & residential applications

AquaMaster Inverter P is the latest range of heat pumps based on R290 natural refrigerant. It offers even higher performance, efficiency and output water temperature up to 75 °C.

By harnessing energy directly from the ground, the AquaMaster Inverter P is marked by a year-round best efficiency, exceptional reliability, and durability.

Suitable for heating and cooling of individual houses, flats or complexes of properties with shared ground wells or horizontal collectors.



AquaMaster Inverter P
Ecology & economy in one



AquaMaster Inverter Combi P
With integrated SHW tank




KEY FEATURES

- High efficiency and future-proofing with near-zero GWP refrigerant R290
- **Power up to 17 kW (B0W35)**
- Independent of outside temperature or weather
- All internal components fully serviceable
- High reliability and easy maintenance
- Warranty and after-warranty service directly from the manufacturer
- Passive cooling mode as optional
- Integrated control system for up to 6 heating circuits
- Online control and monitoring





GROUND-TO-WATER HEAT PUMPS

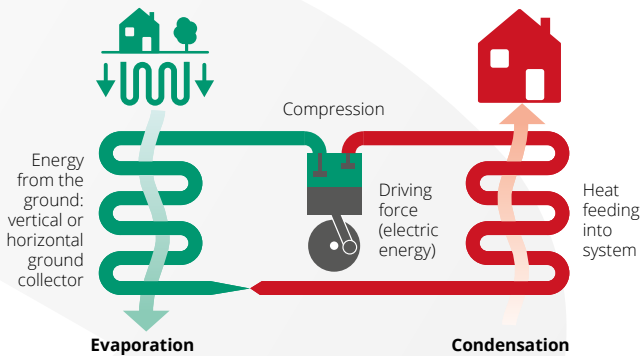

HOW THEY WORK

Ground-to-water heat pumps extract energy from the ground by means of a vertical or horizontal collector*. Antifreeze circulates through the collector and removes ground heat. Thanks to the constant temperature of the ground, the heat pump has a stable source of energy throughout the year. The heat extracted from the ground is then transferred to the building. **The system achieves a seasonal efficiency up to 5.5 times higher than of a conventional electric boiler.**



MAIN ADVANTAGES

The ground-to-water system offers **stable heating performance throughout the year** and generally higher efficiency than air-to-water systems. The ground collector with a predicted lifetime of up to 100 years is an enduring investment in your building(s) and/or land(s).



HEATS IN WINTER, COOLS IN SUMMER

They are suitable not only for heating and year-round heating of hot water or swimming pools but also for highly efficient cooling of the building in summer thanks to the option of reverse or passive cooling.



HEAT PUMPS AND SUBSIDIES

Heat pumps are recognised as **a renewable energy source**. Ask your local distributor if it is possible to obtain subsidies for them.

*The depth of the vertical collector must be approximately 15-20 meters per 1 kW of building's heat loss. Land area for the horizontal collector is approximately 35-40 m² per 1 kW of a building's heat loss.

MASTER THERM: A CZECH MANUFACTURING TRADITION SINCE 1994

Master Therm is a manufacturer of air-to-water, ground-to-water and water-to-water heat pumps for residential, commercial and industrial buildings. All technical development and production of Master Therm heat pumps is carried out in the Czech Republic, EU.



More than two thirds of Master Therm's production is exported abroad, especially to Western Europe. For example, it has supplied 170 AquaMaster Inverter heat pumps for a development project in Cardiff, UK, where the pumps are connected to a system of 79 shared ground boreholes. Master Therm also implements special projects such as the system heat recovery in the supercomputer centre at IT4Innovations in Ostrava or reuse of heat within the ČEZ Energo units.



AquaMaster Inverter P

Ecology & economy in one

Efficient, quite and powerful ground-to-water heat pump with an output of up to 17 kW.

All in one

Compact aluminium casing with minimum installation space.



Models AQ17IP and AQ22IP are even smaller and fit into small technical rooms or even kitchen cupboards.



Safety first

With integrated refrigerant leak detector and automatic shut down of the unit.

Ventilation box for maximum level of safety available as factory equipment.

A⁺⁺⁺ Energy efficiency



Top-notch design



Online control

Unique Master Therm software for pump control

- Custom application for controlling the cooling circuit and peripherals- Equithermal MaR (measurement and regulation)
- Advanced **temperature feedback control in the building** based on internal room temperature sensors
- Control via touchscreen terminal or **online application**
- Includes **remote service monitoring** and diagnostics
- Control of up to 6 heating circuits, including the possibility of connecting a swimming pool or solar panel
- Cooperation with photovoltaics: **in-built connection to PV inverter**
- Smart tariff & Smart Grid: **automatic optimization of heat pump's operation based on future spot electricity prices**



SMART GRID READY ✓



Model	Performance at B0W35	P-Design	Heat loss of the building Q_z	Seasonal energy efficiency of heating at 35 °C low temperature operation		Seasonal energy efficiency of heating at 55 °C medium temperature operation		Maximum heating temperature	Order number
	kW	kW	kW	SCOP	class	SCOP	class	°C	regulation PLUS (pCO5)
AquaMaster 17 Inverter P	1–5	4	up to 5	TBA	TBA	TBA	TBA	75	1-ph: AQ17IP-111U
AquaMaster 22 Inverter P	2–8	6	up to 8	TBA	TBA	TBA	TBA	75	1-ph: AQ22IP-111U
AquaMaster 30 Inverter P	3–12	9	up to 12	TBA	TBA	TBA	TBA	75	3-ph: AQ30IP-111U
AquaMaster 37 Inverter P	4–17	13	up to 17	TBA	TBA	TBA	TBA	75	3-ph: AQ37IP-111U
Designed for									multiple-circuit heating systems
Main heating circuit									yes
Independent heating circuit									independently 2 incl. mixing
Space temperature									in 2 zones
Hot water (SHW)									yes
Optionally									up to 6 heating circuits

Optional equipment

Master Therm Online App

Connecting the pump to a central Master Therm server allows the pump to be controlled online from anywhere via the web or app. Includes remote service access.

Passive cooling module

Exclusive for ground-to-water pumps. Direct heat extraction from the interior of the ground collector or borehole. Extremely economical summer cooling of the building without the need for compressor work. Contributes to collector regeneration after the heating season.

Terminal pAD

Temperature compensation for independent heating circuit.

Terminal pADh (with humidity sensor)

Temperature compensation for independent heating circuit with dew point watching (floor cooling).

Expansion module

Increases the number of regulated independent heating circuits up to 6 (from the basic 2).

Integrated electric meter

Built-in 1- or 3-phase electric meter for local measurement of electricity consumption. MID certification.

RAL colour

Individual colour for pump panels.

KEY FEATURES

- Compact ground-to-water heat pump
- Frequency-controlled compressor with R290 refrigerant
- Full serviceability of all components



- Indoor unit sound attenuated to the level of ordinary refrigerators



- Use for **heating and cooling of the building** including SHW preparation

- **Passive cooling module as optional**

- Smart home integration: connectivity to the Internet including 24/7 monitoring, modbus/ BMS, integrated MID electric meter



- **Communication with PV inverter and batteries**, connection into Smart Grids etc.

- Integrated circulation pumps for primary and secondary circuit incl. a 3-way valve

- **Ventilation box as recommended optional equipment**



- Integrated circulation pumps for primary and secondary circuit incl. a 3-way valve

- **Heating / SHW water temperature up to 75 °C**

- Anti-legionella function from compressor only



AquaMaster Inverter Combi P

With integrated SHW tank

Extremely compact, quiet and efficient ground-to-water heat pump with an output of up to 5 kW. Ready for low-carbon & sustainable properties.

All in one

Thanks to the compact design the unit occupies minimum space (only 0.3 m²). Available in both left and right configurations.

Safety first

With integrated refrigerant leak detector and automatic shut down of the unit. Thanks to minimum refrigerant volume inside the unit there is no need for ventilation.



Easy installation

Significant time- and cost-saving due to the "all-in-one" solution. A kit for a quick installation (expansion tank, pressure gauge, filter, fittings) also available.

Integrated stainless steel cylinder of 150 l

SHW temperature up to 65 °C. Anti-legionella function from compressor only. No backup heat required.

A⁺⁺⁺ Energy efficiency



Top-notch design



Online control

Unique Master Therm software for pump control

- Custom application for controlling the cooling circuit and peripherals- Equithermal MaR (measurement and regulation)
- Advanced **temperature feedback control in the building** based on internal room temperature sensors
- Control via touchscreen terminal or **online application**
- Includes **remote service monitoring** and diagnostics
- Control of up to 6 heating circuits, including the possibility of connecting a swimming pool or solar panel
- Cooperation with photovoltaics: **in-built connection to PV inverter**
- Smart tariff & Smart Grid: **automatic optimization of heat pump's operation based on future spot electricity prices**



SMART GRID READY ✓



Model	Performance at B0W35	P-Design	Heat loss of the building Q_z	Seasonal energy efficiency of heating at 35 °C low temperature operation		Seasonal energy efficiency of heating at 55 °C medium temperature operation		Maximum heating / SHW temperature	Order number
	kW	kW	kW	SCOP	class	SCOP	class	°C	regulation PLUS (pCO5)
AquaMaster 17 Inverter Combi P	1-5	4	up to 5	4.87	A+++	3.76	A++	75 / 65	1-ph / left: AQ17ICP-111L 1-ph / right: AQ17ICP-111R
Designed for									multiple-circuit heating systems
Main heating circuit									yes
Independent heating circuit									independently 2 incl. mixing
Space temperature									in 2 zones
Hot water (SHW)									yes
Optionally									up to 6 heating circuits

Optional equipment

Master Therm Online App

Connecting the pump to a central Master Therm server allows the pump to be controlled online from anywhere via the web or app. Includes remote service access.

Passive cooling module

Exclusive for ground-to-water pumps. Direct heat extraction from the interior of the ground collector or borehole. Extremely economical summer cooling of the building without the need for compressor work. Contributes to collector regeneration after the heating season.

Terminal pAD

Temperature compensation for independent heating circuit.

Terminal pADh (with humidity sensor)

Temperature compensation for independent heating circuit with dew point watching (floor cooling).

Expansion module for PLUS control

Increases the number of regulated independent heating circuits up to 6 (from the basic 2).

Integrated electric meter 1x 25 A

Built-in 1-phase electric meter for local measurement of electricity consumption. MID certification.

RAL colour

Individual colour for pump panels.

Left-side outlets and inlets

Outlets and inlets on the left side of the pump housing (on the right as standard).

KEY FEATURES

- Extremely compact ground-to-water heat pump
- Frequency-controlled compressor with R290 refrigerant
- **Integrated stainless-steel SHW tank with a volume of 150 l**
- Minimum space requirement (0.3 m²)
- Easy installation incl. quick installation kit
- Full serviceability of all components



- Indoor unit sound attenuated to the level of ordinary refrigerators



- Use for **heating and cooling of the building** including SHW preparation
- **Passive cooling module as optional**
- Smart home integration: connectivity to the Internet including 24/7 monitoring, modbus/ BMS, integrated MID electric meter
- **Communication with PV inverter and batteries**, connection into Smart Grids etc.
- Integrated circulation pumps for primary and secondary circuit incl. a 3-way valve
- Optional circulation pump on the side primary circuit with a 2-way zonal valve



- **Heating water temperature up to 75 °C**
- **SHW temperature up to 65 °C**



- Anti-legionella function from compressor only

AquaMaster Inverter P

Power range at B0W35

Heat loss of the building Q_z

P-Design

Power B0W35 ¹

60 rps

COP

Power W10W35

60 rps

COP

Power B0W55

60 rps

COP

Power W10W55

60 rps

COP

Power B5W35

60 rps

COP

Seasonal heating energy efficiency at 35 °C
low temperature operationpower ³

SCOP

 η_s

class

Seasonal heating energy efficiency at 55 °C
medium temperature operationpower ³

SCOP

 η_s

class

Refrigerant

Electric circuit breaker ²

Compressor

connection

Weight

Maximum heating water temperature

Approximate required length of ground well
(or the sum of the length of several wells)AquaMaster
Inverter 17 IPAquaMaster
Inverter 22 IPAquaMaster
Inverter 30 IPAquaMaster
Inverter 37 IP


			AquaMaster Inverter 17 IP	AquaMaster Inverter 22 IP	AquaMaster Inverter 30 IP	AquaMaster Inverter 37 IP
Power range at B0W35			1-5	2-8	3-12	4-17
Heat loss of the building Q_z	kW		up to 5	up to 8	up to 12	up to 17
P-Design	kW		4	6	9	13
Power B0W35 ¹	kW	60 rps	2.57	5.23	7.72	16.5
		COP	4.27	4.25	4.62	4.35
Power W10W35	kW	60 rps	3.33	6.98	9.91	21.2
		COP	5.63	5.67	5.99	5.72
Power B0W55	kW	60 rps	2.39	4.89	6.91	14.7
		COP	2.74	2.88	3.10	2.90
Power W10W55	kW	60 rps	3.02	6.38	9.04	19.3
		COP	5.63	3.65	3.82	3.59
Power B5W35	kW	60 rps	2.89	6.05	TBA	TBA
		COP	4.81	4.90	TBA	TBA
Seasonal heating energy efficiency at 35 °C low temperature operation	kW	power ³	TBA	TBA	TBA	TBA
		SCOP	TBA	TBA	TBA	TBA
	%	η_s	TBA	TBA	TBA	TBA
		class	TBA	TBA	TBA	TBA
Seasonal heating energy efficiency at 55 °C medium temperature operation	kW	power ³	TBA	TBA	TBA	TBA
		SCOP	TBA	TBA	TBA	TBA
	%	η_s	TBA	TBA	TBA	TBA
		class	TBA	TBA	TBA	TBA
Refrigerant			R290	R290	R290	R290
Electric circuit breaker ²			16 A"B"	20 A"B"	20 A"B"	25 A"B"
Compressor		connection	1x 230 V	1x 230 V	3x 400 V	3x 400 V
Weight	kg		75	80	180	180
Maximum heating water temperature	°C		75	75	75	75
Approximate required length of ground well (or the sum of the length of several wells)	m		75	120	180	255

¹ Performance data according to EN 14 511, in accordance with EHPA requirements for the award of the Q quality mark. A7W35 60 Hz - air 7 °C, water 35 °C, compressor frequency 60 Hz.

² Recommended value of electrical protection 3x 400 V, incl. auxiliary integrated electric boiler. The 22 I, 26 I, 30 I units can also be connected to a mains supply of 1x 230 V with a fuse of 40 A "B" (22 I) or 50 A "B" (26 I, 30 I).

³ Data for 90 I at 90 Hz.


⁴ Design output at an outdoor temperature of -10 °C according to EN 14 825.

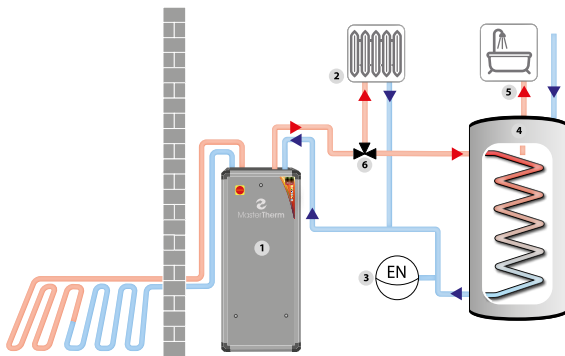

DIRECT CONNECTION OF HEAT PUMP TO HEATING SYSTEM AND HW HEATING TRANSFER MODE

- 1 heat pump
- 2 heating system
- 3 expansion tank
- 4 indirect HW heating storage tank
- 5 HW outlet
- 6 3-way valve

The heat pump (1) is directly connected to the heating system. The heating water temperature varies depending on the outside temperature. The heating is interrupted, and the 3-way valve (6) is switched on when HW heating is required. By increasing the heating water outlet temperature from the heat pump, the HW storage tank (4) is heated. After HW heating is finished, the system returns to area heating mode. The scheme is particularly suitable for underfloor heating, exceptional also for systems with a sufficiently sizeable volume of heating water. The possibility for local control of the heating system (control of the heating water flow through the heating system) is limited.

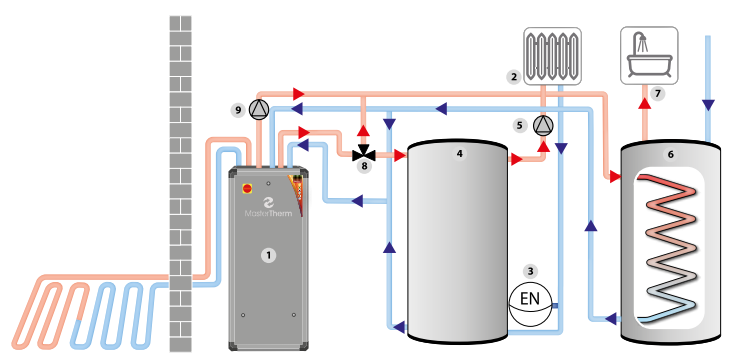


CONNECTION WITH HEATING WATER ACCUMULATION TANK AND HW HEATING TRANSFER MODE

- 1 heat pump
- 2 heating system
- 3 expansion tank
- 4 storage tank
- 5 heating system
- 6 indirect heating HW storage tank
- 7 HW outlet
- 8 3-way valve
- 9 desuperheater


The heat pump (1) is connected to the heating system via the storage tank (4), which acts as both heat storage and thermohydraulic distributor. The temperature of the heating water varies depending on the outside temperature. The flow of heating water through the heating system is provided by a circulating pump (5). When HW heating HW is required, the heating is interrupted, and the 3-way valve (8) is switched on. By increasing the outlet temperature of the heating water from the heat pump, the HW storage tank is heated (6). After the heating is finished, the system returns to area heating mode. The desuperheater (optional) is a special heat exchanger that extracts high-temperature energy at the output of the running compressor. Using a separate hydraulic circuit (9), this energy is used for highly efficient HW heating.

DIMENSIONS

AQ 17 IP a AQ 22 IP

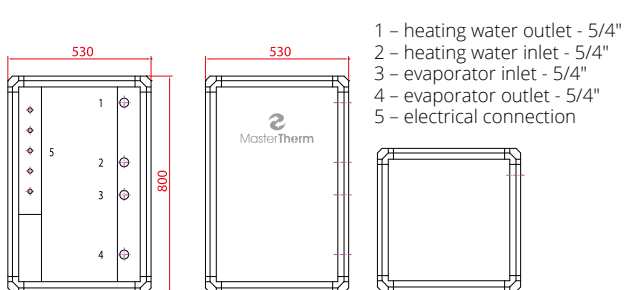

AQ 30 IP a AQ 37 IP

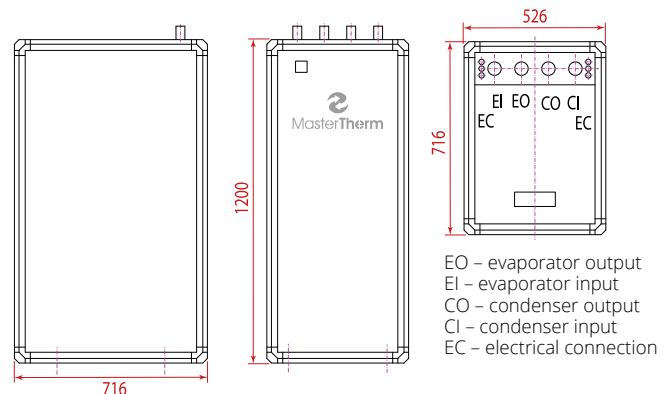

AquaMaster Inverter Combi P



**AquaMaster
17 ICP**

Power range at B0W35			1-5
Heat loss of the building Q_z		kW	up to 5
P-Design		kW	4
Power B0W35 ¹	60 rps	kW	3.87
	COP		4.29
Power W10W35	60 rps	kW	5.23
	COP		5.75
Power B0W55	60 rps	kW	3.50
	COP		2.97
Power W10W55	60 rps	kW	4.72
	COP		3.71
Power B5W35	60 rps	kW	4.51
	COP		4.96
Seasonal heating energy efficiency at 35 °C low temperature operation	power ³	kW	3.87
	SCOP		4.87
	η_s	%	187
	class		A+++
Seasonal heating energy efficiency at 55 °C medium temperature operation	power ³	kW	3.52
	SCOP		3.76
	η_s	%	143
	class		A++
Refrigerant			R290
Volume of the hot water storage tank		l	150
Electric circuit breaker ²			1x 20 A"B"
Compressor	connection		1x 230 V
Weight / operational weight		kg	105 / 260
Maximum heating water temperature		°C	75
Maximum sanitary hot water temperature		°C	65
Approximate required length of ground well (or the sum of the length of several wells)		m	75


1 Performance data according to EN 14 511, B0W35 60 Hz – antifreezing mix 0 °C, water 35 °C, compressor frequency 60 Hz.

2 Recommended value of electrical protection in basic equipment, without auxiliary electric boiler.

3 Design output at outdoor temperature of -10 °C according to EN 14 825.


DIMENSIONS OF MODEL AQ 17 ICP

- 1 heating water outlet – 5/4"
- 2 heating water inlet – 5/4"
- 3 evaporator inlet – 5/4"
- 4 evaporator outlet – 5/4"
- 5 electrical connection
- 6 SHW Inlet 1/2"ID
- 7 SHW Outlet 1/2"ID

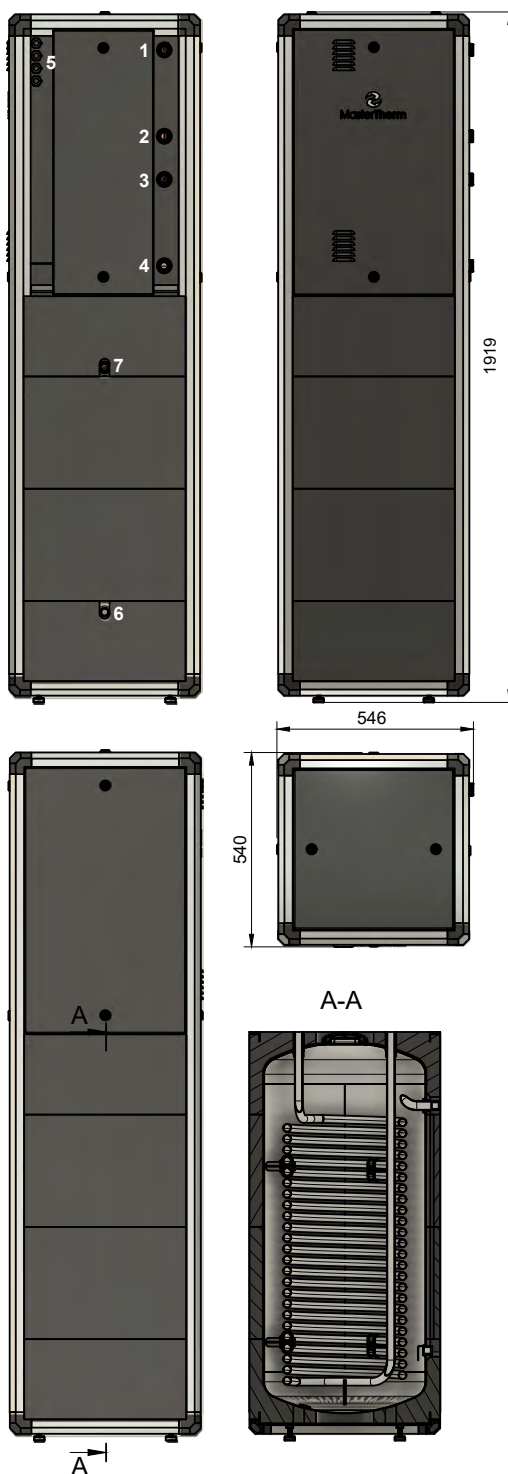

AquaMaster Inverter P

High powered
Ground-to-water

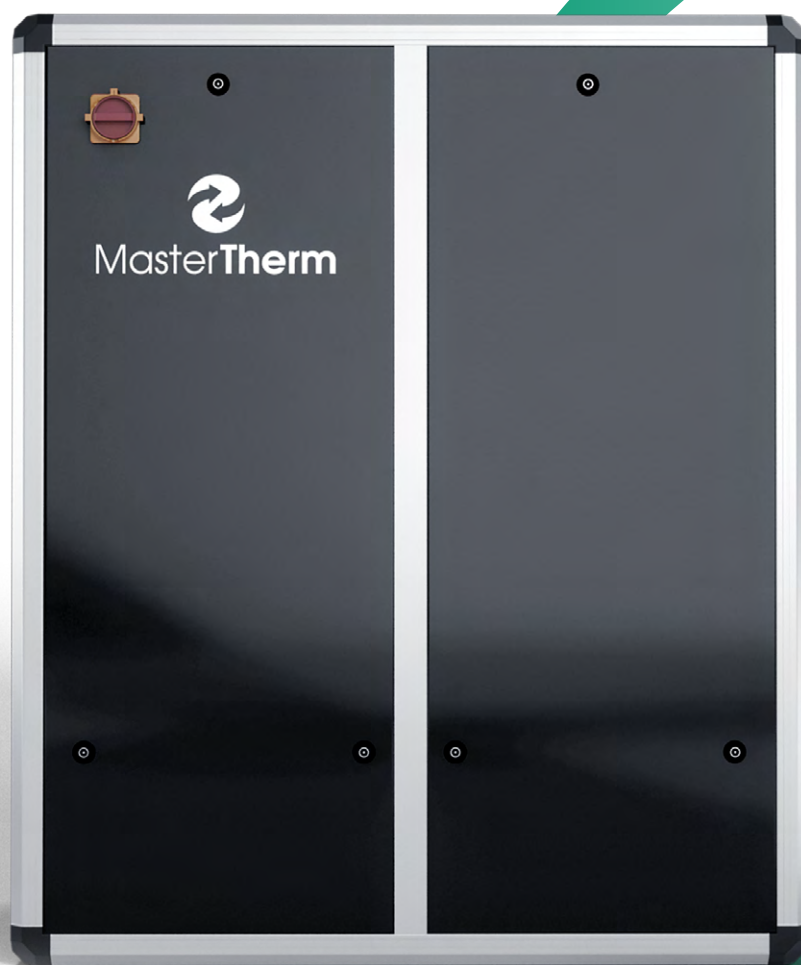

Czech (EU)
product



A tradition
since 1994



Exported into
30 countries
worldwide



Online
control

AquaMaster Inverter P

for public, commercial, residential buildings and industry

World's unique range of heat pumps with R290. Power from 35 to 70 kW. Offers even higher performance, efficiency and output water temperature up to 75 °C.

Designed for heating and cooling of large-scale facilities such as office buildings, schools, sports facilities, manufacturing, warehouse industrial halls and others. Also suitable for industrial cooling and waste heat recovery systems from industrial processes or kitchens.

Easily connected in cascade, providing exceptional overall performance for large-scale buildings and industrial plants.



AquaMaster 45 Inverter P

35 kW with R290



AquaMaster 90 Inverter P

70 kW with R290




KEY FEATURES

- High efficiency and future-proofing with near-zero GWP refrigerant R290
- **Power up to 70 kW**
- Total cascade power of more than 1100 kW
- All internal components fully serviceable
- High reliability and easy maintenance
- Warranty and after-warranty service directly from the manufacturer
- Passive cooling mode as optional
- Online control and monitoring





GROUND-TO-WATER HEAT PUMPS

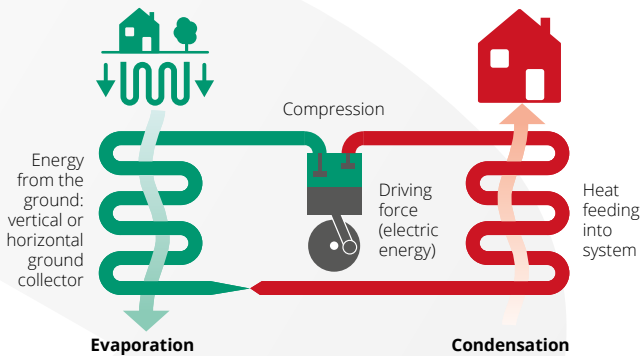

HOW THEY WORK

Ground-to-water heat pumps extract energy from the ground by means of a vertical or horizontal collector. Antifreeze circulates through the collector and removes ground heat. Thanks to the constant temperature of the ground, the heat pump has a stable source of energy throughout the year. The heat extracted from the ground is then transferred to the building. **The system achieves a seasonal efficiency up to 5.5 times higher than of a conventional electric boiler.**



MAIN BENEFITS

The **high-end components** used and **the unique control system employed offer highly efficient and extremely quiet operation**, the ability to control up to 6 independent heating/cooling circuits and extended service life.



PROMPT RETURN ON INVESTMENT

An investment proven in practice: In the industrial facilities implemented so far, **the economic return is in the order of several years.**



HEATING AND COOLING

With a heat pump, a building or facility can be heated in winter and cooled in summer.



POWER CASCASCade FOR HIGH PERFORMANCE

With the integrated MasterLAN software, **up to 16 heat pumps can be easily set up and connected to control power cascades.**

MASTER THERM: A CZECH MANUFACTURING TRADITION SINCE 1994

Master Therm is a manufacturer of air-to-water, ground-to-water and water-to-water heat pumps for residential, commercial and industrial buildings. All technical development and production of Master Therm heat pumps is carried out in the Czech Republic, EU.



More than two thirds of Master Therm's production is exported abroad, especially to Western Europe. For example, it has supplied 170 AquaMaster Inverter heat pumps for a development project in Cardiff, UK, where the pumps are connected to a system of 79 shared ground boreholes. Master Therm also implements special projects such as the system heat recovery in the supercomputer centre at IT4Innovations in Ostrava or reuse of heat within the ČEZ Energo units.



AquaMaster 45 / 90 Inverter P

Powerful One and Two compressor units

With one or two compressors for extremely efficient heating and cooling of large-scale buildings. Also suitable for industrial cooling and waste heat recovery systems (industrial processes, kitchens etc.).



AquaMaster 45 Inverter P

1 compressor, 35 kW

AquaMaster 90 Inverter P

2 compressors in one unit, 70 kW



Ready for industrial applications



Top-notch design



Online control

Unique Master Therm software for pump control

- Custom application for control of the cooling circuit and peripherals
- Equithermal MaR (measurement and control)
- Advanced **temperature feedback control in the building** based on indoor room temperature sensors
- Control via touchscreen terminal or **online application**
- Includes remote service monitoring and diagnostics
- Control of up to 6 heating circuits incl. optional solar connection
- Cooperation with photovoltaics: **in-built connection to PV inverter**
- Smart tariff & Smart Grid: **automatic optimization of heat pump's operation based on momentary electricity tariffs**



SMART GRID READY ✓



Model	Performance at B0W35	Heat loss of the building Q_z	Seasonal energy efficiency of heating at 35 °C low temperature operation		Seasonal energy efficiency of heating at 55 °C medium temperature operation		Maximum heating temperature	Order number
	kW	kW	SCOP	class	SCOP	class	°C	regulation PLUS (pCO5)
AquaMaster 45 IP	5-35	up to 35	4.85	A+++	3.79	A++	75	3-ph: AQ45IP-311U
AquaMaster 90 IP	10-70	up to 70	TBA	TBA	TBA	TBA	75	3-ph: AQ90IP-311U
Designed for							multi-circuit heating systems	
Main heating circuit							yes	
Auxiliary heating circuit							independently 2 incl. mixing	
Space temperature							in 2 zones	
Hot water (DHW)							yes	
Optional							up to 6 heating circuits	

Optional equipment

Master Therm Online App

Connecting the pump to a central Master Therm server allows the pump to be controlled online from anywhere via the web or app. Includes remote service access.

Passive cooling module

Exclusive for ground-to-water pumps. Direct heat extraction from the interior of the ground collector or borehole. Extremely economical summer cooling of the building without the need for compressor work. Contributes to collector regeneration after the heating season.

Terminal pAD

Temperature compensation for independent heating circuit.

Terminal pADh (with humidity sensor)

Temperature compensation for independent heating circuit with dew point watching (floor cooling).

Expansion module

Increases the number of regulated independent heating circuits up to 6 (from the basic 2).

Integrated electric meter

Built-in 1- or 3-phase electric meter for local measurement of electricity consumption. MID certification.

RAL colour

Individual colour for pump panels.

KEY FEATURES

- Compact ground-to-water heat pump for residential, commercial and industrial applications with R290 refrigerant



- **Power up to 70 kW (B0W35)**
- **Total cascade power of 1100 kW**

- Use for heating and cooling of the building including SHW preparation
- **Excellent also for industrial cooling and waste heat recovery**
- Extensive intelligent optional equipment: internet connection (monitoring and logging), modbus/BMS, integrated MID electric meter or heat meter, communication with PV Inverter and Batteries, smart grid etc.
- Passive cooling module (optional equipment)



- **Ventilation box as recommended optional equipment**



- Integrated circulation pumps for primary and secondary circuit incl. a 3-way valve

- **Max heating water temperature 75 °C**
- Anti-legionella function from compressor only. No backup heater required



AquaMaster Inverter P

Power range at B0W35

Heat loss of the building Q_z Power B0W35 ¹

60 rps

COP

Power W10W35

60 rps

COP

Power B0W55

60 rps

COP

Power W10W55

60 rps

COP

Power B0W35

120 rps

COP

Seasonal heating energy efficiency at 35 °C low temperature operation

power ³

SCOP

 η_s

class

Seasonal heating energy efficiency at 55 °C medium temperature operation

power ³

SCOP

 η_s

class

Refrigerant

Number of compression circuits

Electric circuit breaker ²

Compressor

connection

Weight

Maximum heating water temperature

Approximate required length of ground well (or the sum of the length of several wells)



AquaMaster 45 IP

AquaMaster 90 IP

5–35

10–70

up to 35

up to 70

16.5

TBA

4.35

TBA

21.2

TBA

5.72

TBA

14.7

TBA

4.35

TBA

19.3

TBA

3.59

TBA

35.22

TBA

3.72

TBA

35.23

TBA

4.85

TBA

186

TBA

A+++

TBA

33.93

TBA

3.79

TBA

144

TBA

A++

TBA

R290

R290

1

2

25 A"B"

40 A"B"

3x 400 V

3x 400 V

180

~ 350

75

75

525

1050

1 Performance data according to EN 14 511, B0W35 60 Hz – antifreezing mix 0 °C, water 35 °C, compressor frequency 60 Hz.


2 Recommended value of electrical protection in basic equipment, without auxiliary electric boiler.

3 Design output at outdoor temperature of -10 °C according to EN 14 825.




DIMENSIONS


AquaMaster 45 IP

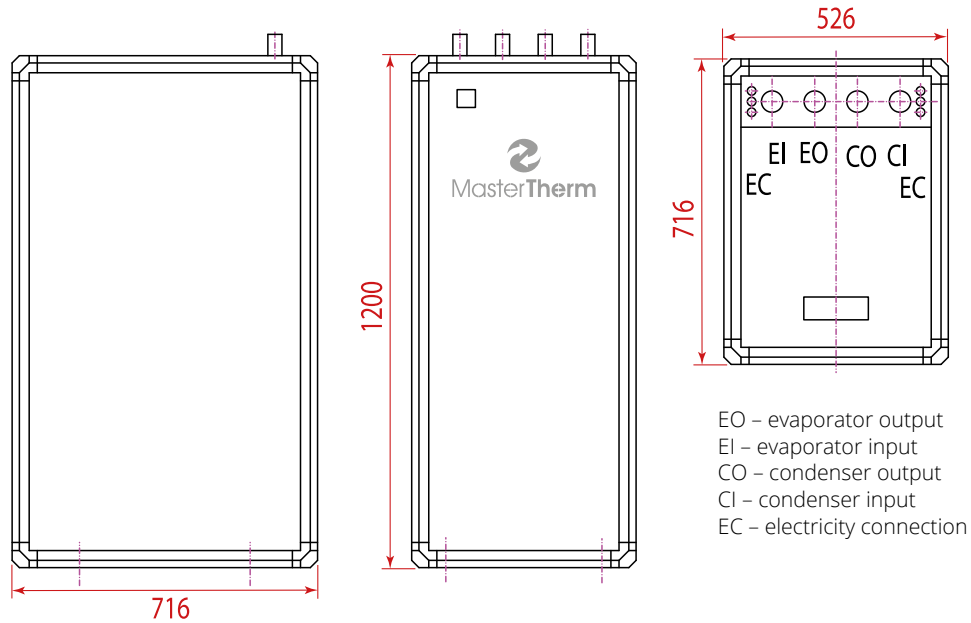

AquaMaster 90 IP

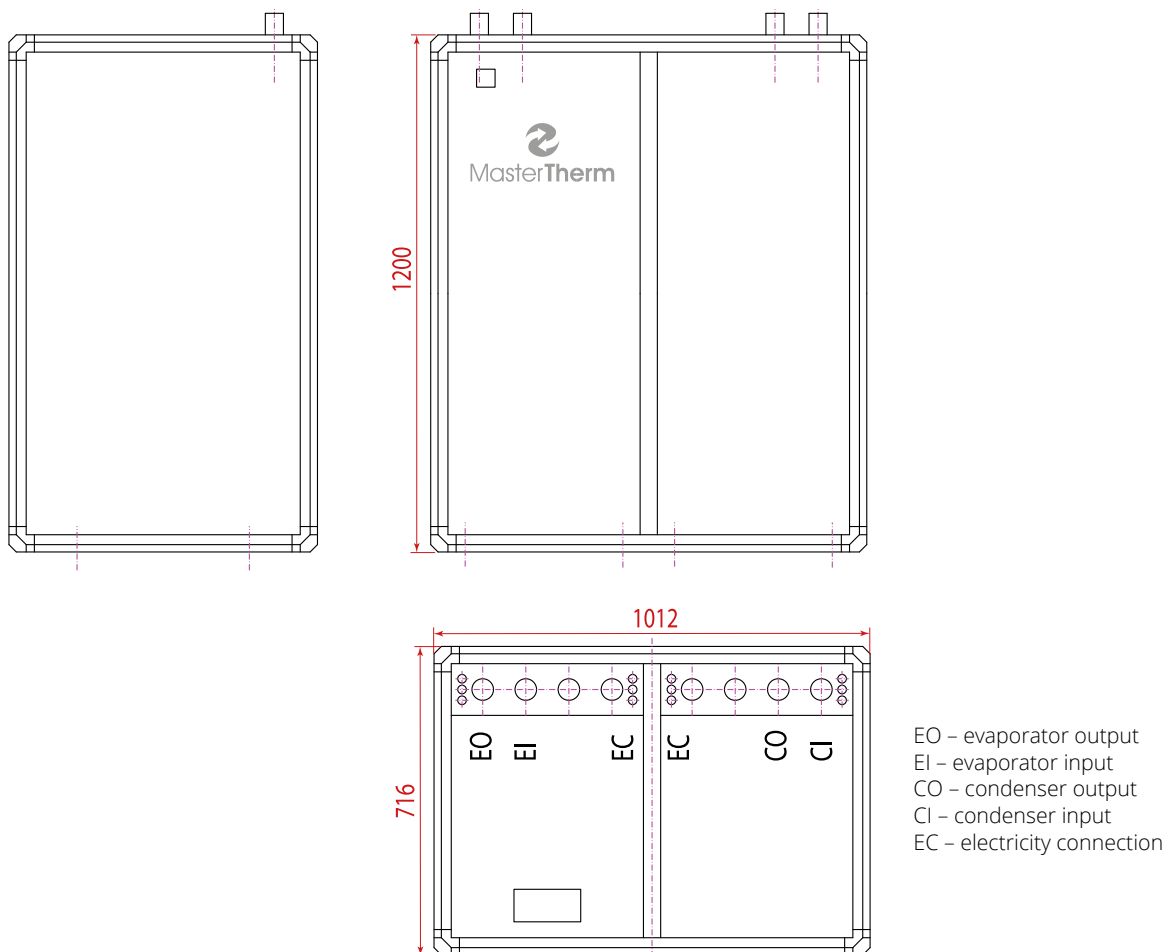

Master Therm ONLINE



Easy remote control of heat pump. Available not only for family houses, but also for apartment buildings, administrative, commercial or public buildings, and industrial applications.



Possibility of connection to the superior regulation



Cooperation with photovoltaics, loading of spot electricity prices, adaptive regulation of pump activity



Interface for mobile, tablet and desktop



24/7 online monitoring and remote service diagnostics



Hotline & Technical support directly from the manufacturer



THE PREMIER HEAT PUMP PIONEERS SINCE 1994



- 2024**
Complete range of heat pumps from 1 to 70 kW with natural refrigerant R290
- 2023**
New manufacturing facility fully completed and optimised to maximise production quantities
- 2022**
New production facility to accommodate fast growing demand
- 2021**
Master Therm Online & pGDx: new level of control and online diagnostics
- 2018**
AQ ZHX: high-temperature heat pump for industry and heat recovery
- 2017**
BoxAir Inverter Split (air-to-water): split solution with compressor inside the inner unit
- 2016**
BoxAir 60 Inverter (air-to-water) with EVI: heating and cooling of commercial and industrial buildings
- 2010**
BoxAir Inverter (air-to-water): frequency-controlled compressor and fan
- 2008**
AquaMaster Inverter (ground-to-water): frequency-controlled compressor
- 2004**
AirMaster AKU (air-to-water): 1. heat pump with EEV on Czech market
- 1994**
Foundation of Master Therm brand



member of Atrea group



Master Therm tepelná čerpadla, s. r. o.

ID number: 28892275
VAT: CZ28892275

Invoicing address

Václavské náměstí 819/43, 110 00 Praha 1,
Czech Republic, EU

Showroom and correspondence address

Okrajová 187, 253 01 Chýně,
Czech Republic, EU

Production plant

Dolní Tříč 636, 512 43 Jablonec nad Jizerou,
Czech Republic, EU

www.mastertherm.eu

Contact

E-mail: info@mastertherm.cz
Telephone: +420 800 444 000

Service dispatch

E-mail: dispecink@mastertherm.cz
Telephone: +420 773 744 701